

5 V E N U E


EDITION

PHYSICAL PROPERTIES


Width: 52/54" (132/137 CM) Vinyl Wallcovering, Type II **Weight:** 20 oz Per Lineal Yard, 13.3 oz Per Square Yard
Packaging: All patterns are stocked in 30 yard bolts. Must be ordered in 15 yard increments.



DN-VS5-56



DN-VS5-26



DN-VS5-04



DN-VS5-05



DN-VS5-27



DN-VS5-28



DN-VS5-10



DN-VS5-11



DN-VS5-12



DN-VS5-55



DN-VS5-54



DN-VS5-59



DN-VS5-09



DN-VS5-03



DN-VS5-41



DN-VS5-06



DN-VS5-42




DN-VS5-48



DN-VS5-47



DN-VS5-29



DN-VS5-33




DN-VS5-08



DN-VS5-02



DN-VS5-15




DN-VS5-14



DN-VS5-30



DN-VS5-49



DN-VS5-17



DN-VS5-40



DN-VS5-31



DN-VS5-34



DN-VS5-25




DN-VS5-32



DN-VS5-50



DN-VS5-38




DN-VS5-37



DN-VS5-21



DN-VS5-43



DN-VS5-20



DN-VS5-19




DN-VS5-51



DN-VS5-53



DN-VS5-01



DN-VS5-13



DN-VS5-18



DN-VS5-07



DN-VS5-24



DN-VS5-16



DN-VS5-23



DN-VS5-52



DN-VS5-46



DN-VS5-22



DN-VS5-45



DN-VS5-44



DN-VS5-35



DN-VS5-36

DN-VS5-01



DN-VS5-03



DN-VS5-02



DN-VS5-04



DN-VS5-05



DN-VS5-07



DN-VS5-06



DN-VS5-08



DN-VS5-09



DN-VS5-11



DN-VS5-10




DN-VS5-12




DN-VS5-13




DN-VS5-16

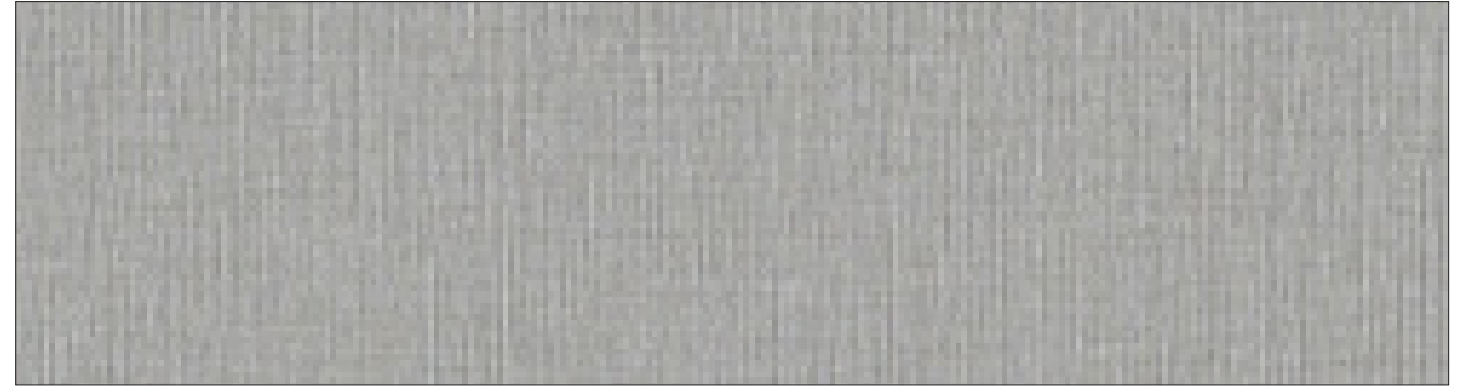

DN-VS5-14

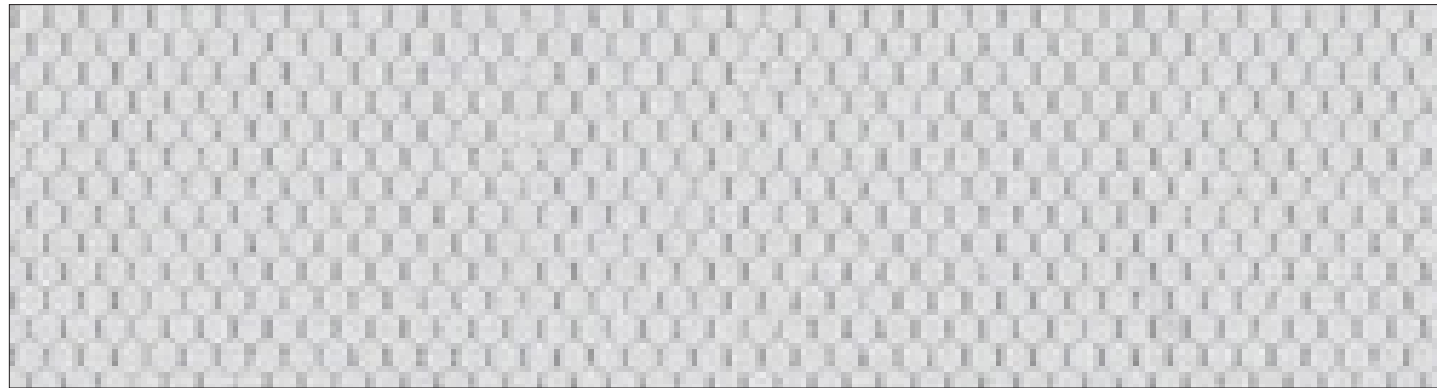

DN-VS5-17

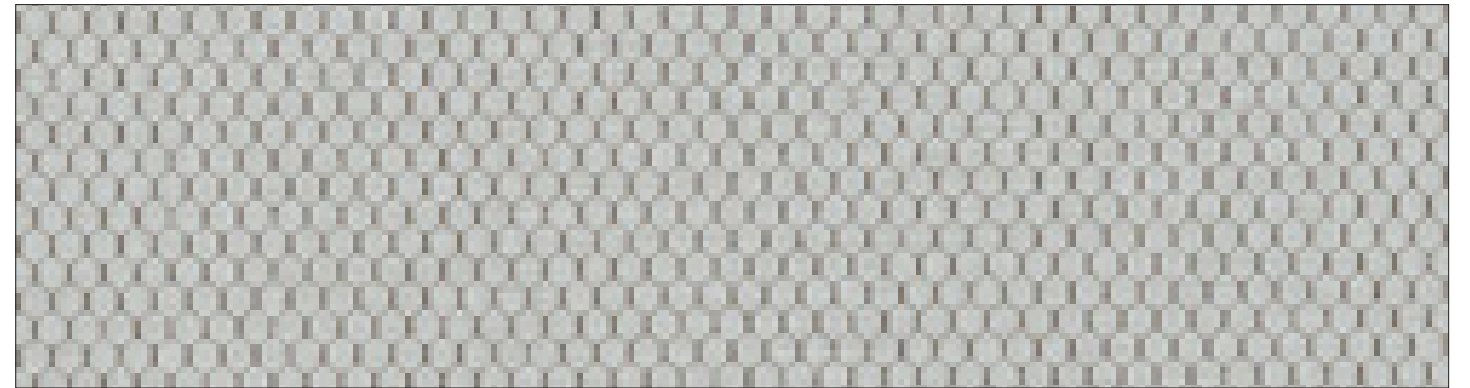

DN-VS5-15



DN-VS5-18



DN-VS5-19



DN-VS5-22



DN-VS5-20



DN-VS5-23



DN-VS5-21



DN-VS5-24



DN-VS5-25



DN-VS5-27



DN-VS5-26



DN-VS5-28



DN-VS5-29



DN-VS5-31



DN-VS5-30



DN-VS5-32



DN-VS5-33



DN-VS5-35



DN-VS5-34



DN-VS5-36



DN-VS5-37



DN-VS5-39




DN-VS5-38



DN-VS5-40



DN-VS5-41

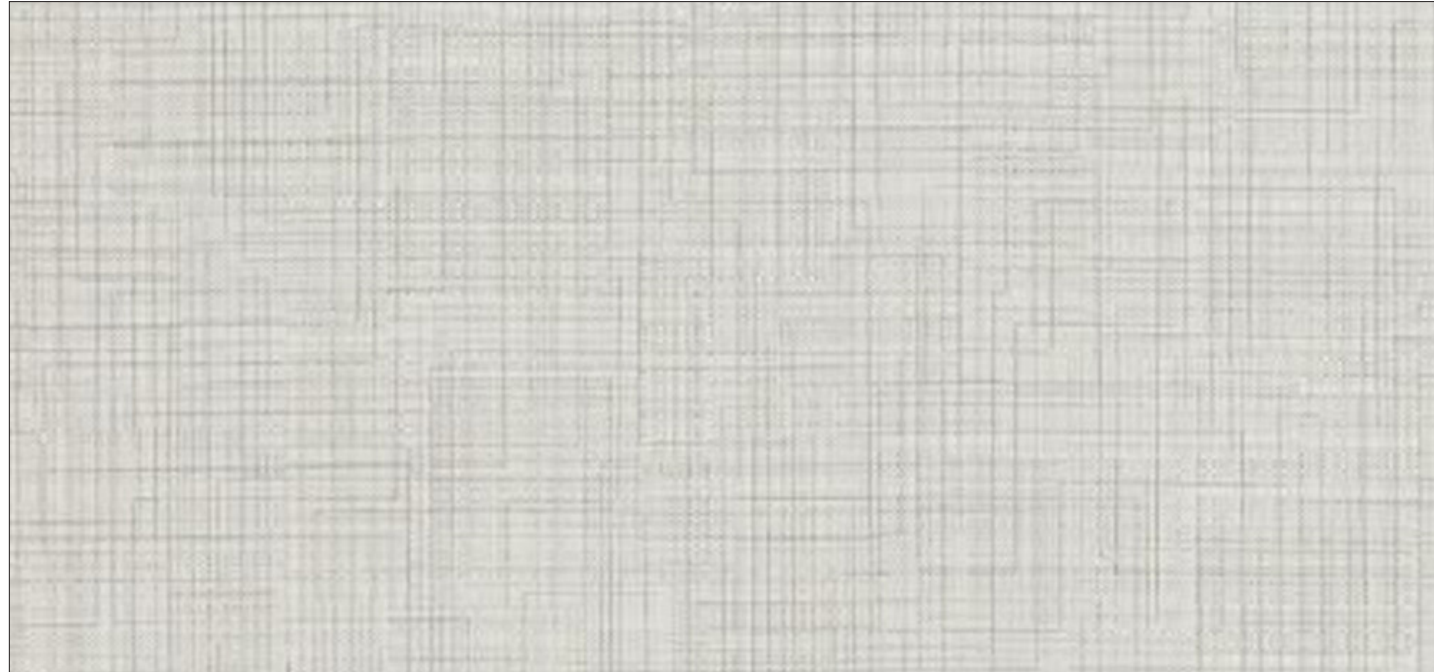


DN-VS5-43



DN-VS5-42



DN-VS5-44

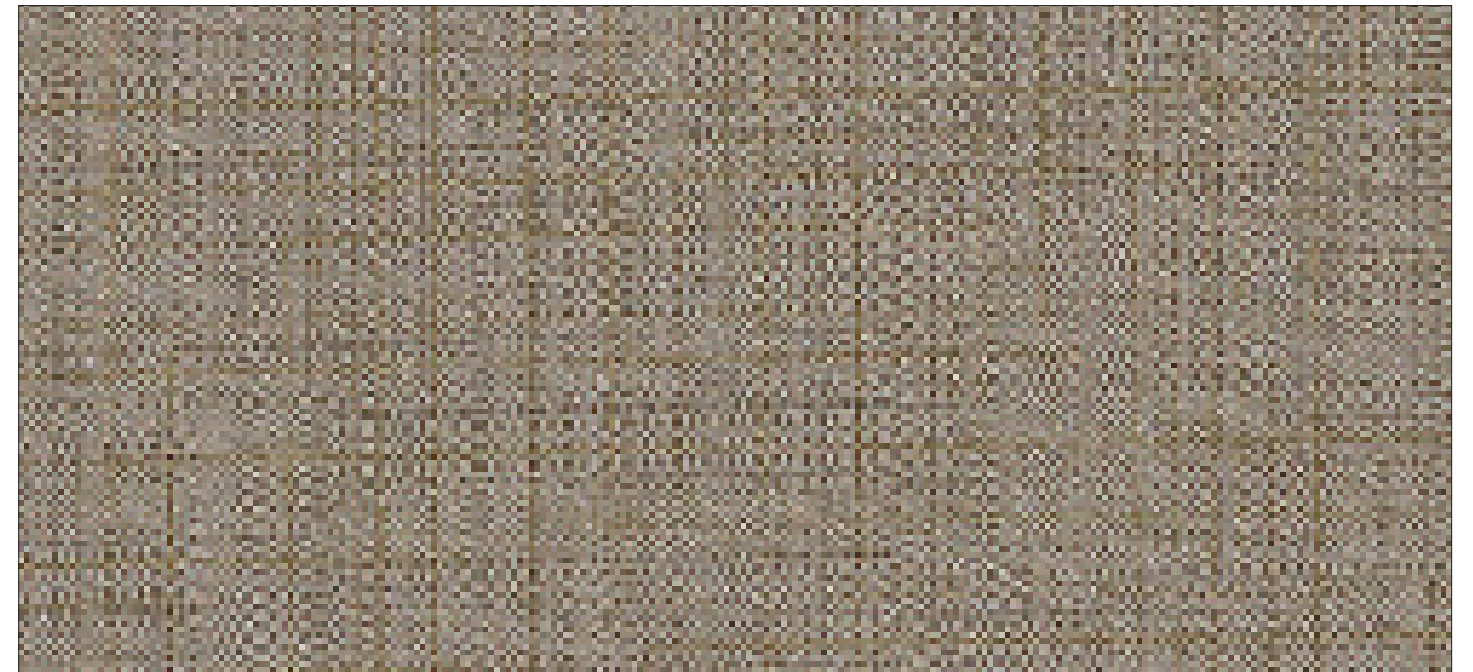


DN-VS5-45



DN-VS5-47



DN-VS5-46

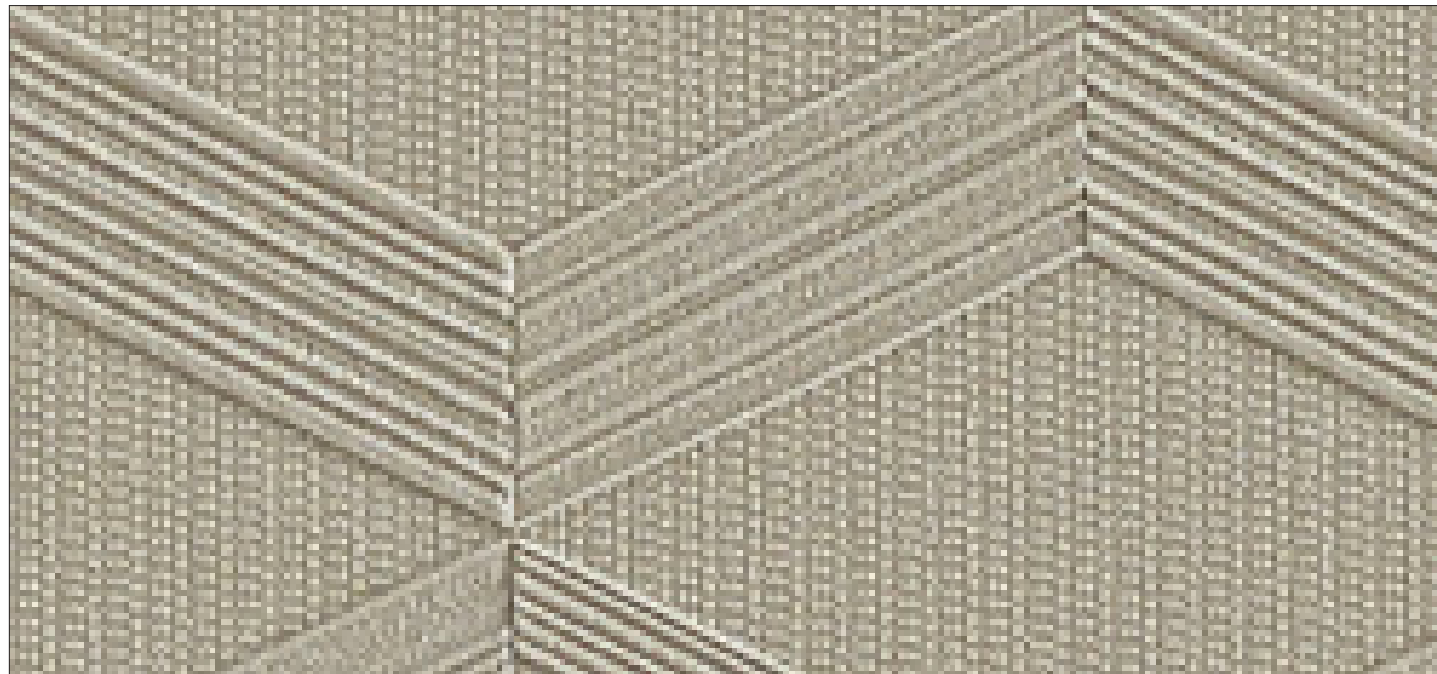

DN-VS5-48



DN-VS5-49



DN-VS5-51



DN-VS5-50



DN-VS5-52



DN-VS5-53



DN-VS5-55



DN-VS5-54



DN-VS5-56



SPECIFICATIONS

LOW VOC TYPE II

FIRE HAZARD CLASSIFICATION RESULTS:

Tested in accordance with ASTM E-84 Tunnel Test Class "A"
Fire Rated.

In addition, this product meets Type II CCC-W-408A
through D & W-101 requirements for Washability,
Scrubbability, Abrasion Resistance and Stain Resistance.

ENVIRONMENT & HEALTH:

Meets California Section 01350 IAQ test requirements for
wallcovering.

Can contribute to LEED EQ 4.1 point for low-emitting
materials, adhesives, and sealants, if used with low VOC
adhesives

Can contribute to LEED MR 5.1 point for regional materials.

ANTI-MICROBIAL FEATURES:

This product is intended for use in buildings that are prop-
erly designed and maintained to avoid moisture infiltra-
tion, condensation and/or accumulation in wall cavities
and wall surfaces, particularly in warm, humid climates.

BREATHE FREE MICRO-VENTING AVAILABLE UPON REQUEST:

Breathe Free Micro-vented wallcovering from Denovo Wall can be used to help control
un-wanted moisture inside a building envelope.

LIMITED WARRANTY:

5 year warranty against manufacturing defects. Additional information is available at www.denovowall.com