

# 5 V E N U E


EDITION

## PHYSICAL PROPERTIES


**Width:** 52/54" (132/137 CM) Vinyl Wallcovering, Type II **Weight:** 20 oz Per Lineal Yard, 13.3 oz Per Square Yard  
**Packaging:** All patterns are stocked in 30 yard bolts. Must be ordered in 15 yard increments.



DN-VS5-56



DN-VS5-26



DN-VS5-04



DN-VS5-05



DN-VS5-27



DN-VS5-28



DN-VS5-10



DN-VS5-11



DN-VS5-12



DN-VS5-55



DN-VS5-54



DN-VS5-59



DN-VS5-09



DN-VS5-03




DN-VS5-41



DN-VS5-06




DN-VS5-42



DN-VS5-48




DN-VS5-47



DN-VS5-29



DN-VS5-33




DN-VS5-08




DN-VS5-02



DN-VS5-15




DN-VS5-14



DN-VS5-30



DN-VS5-49



DN-VS5-17



DN-VS5-40



DN-VS5-31



DN-VS5-34



DN-VS5-25



DN-VS5-32



DN-VS5-50



DN-VS5-38




DN-VS5-37



DN-VS5-21



DN-VS5-43



DN-VS5-20



DN-VS5-19



DN-VS5-51



DN-VS5-53



DN-VS5-01



DN-VS5-13



DN-VS5-18




DN-VS5-07



DN-VS5-24



DN-VS5-16



DN-VS5-23




DN-VS5-52



DN-VS5-46



DN-VS5-22




DN-VS5-45



DN-VS5-44



DN-VS5-35



DN-VS5-36

**DN-VS5-01**



**DN-VS5-03**



**DN-VS5-02**



**DN-VS5-04**



**DN-VS5-05**



**DN-VS5-07**



**DN-VS5-06**



**DN-VS5-08**



**DN-VS5-09**



**DN-VS5-11**




**DN-VS5-10**



**DN-VS5-12**



**DN-VS5-13**

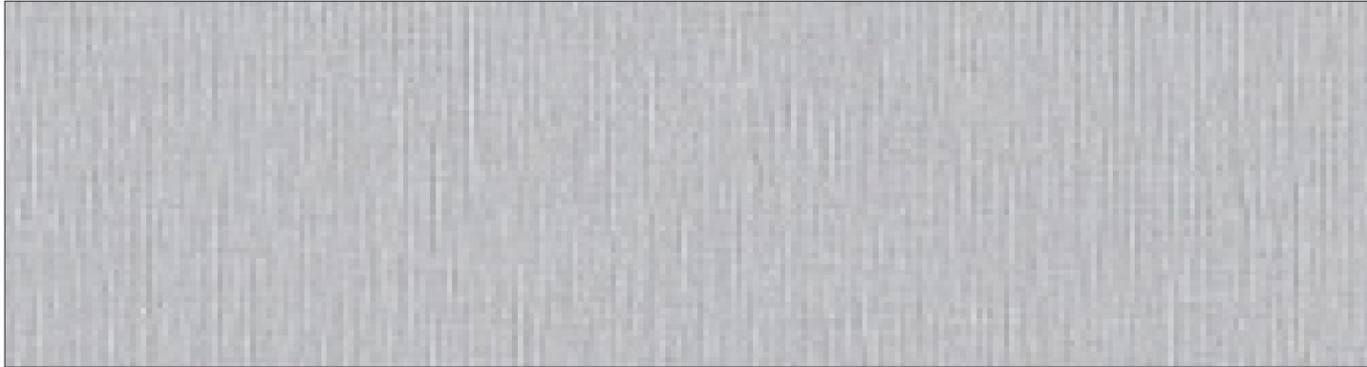


**DN-VS5-16**




**DN-VS5-14**



**DN-VS5-17**

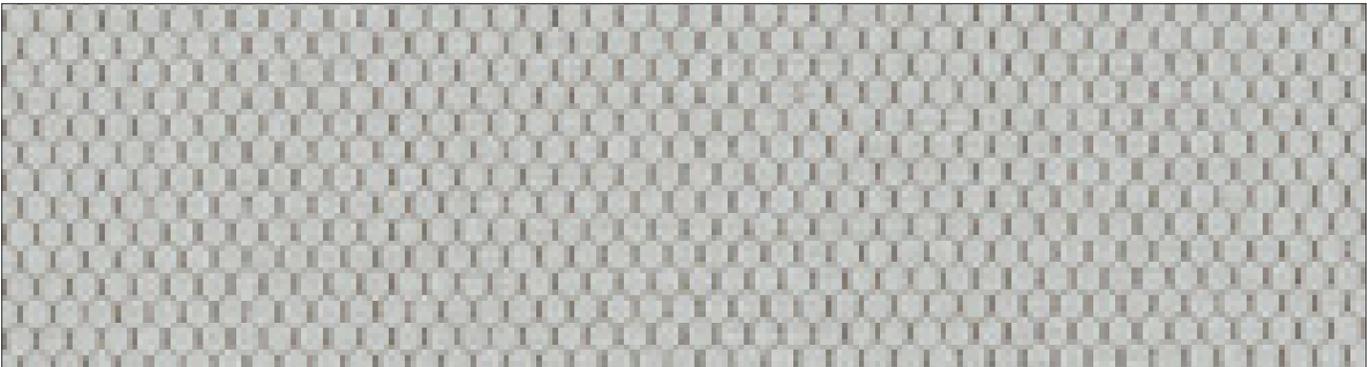

**DN-VS5-15**

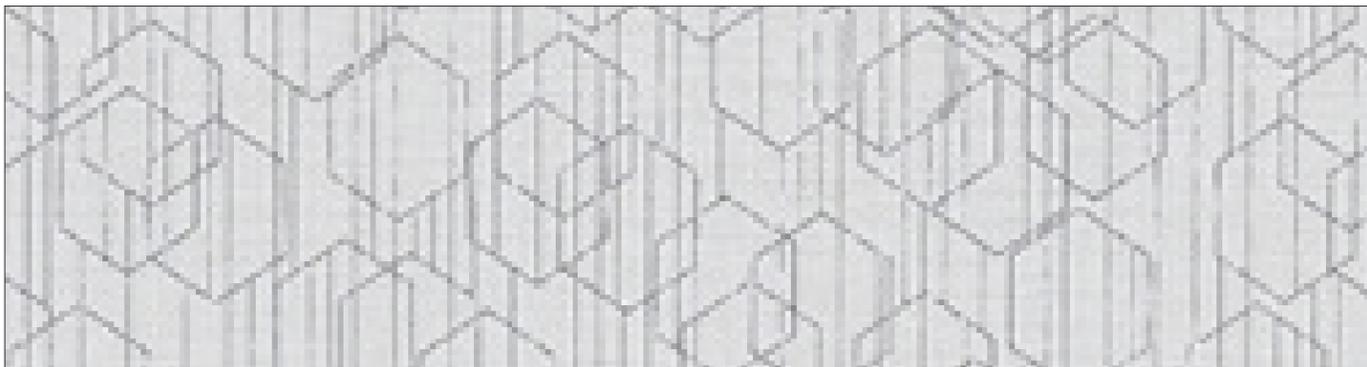

**DN-VS5-18**



**DN-VS5-19**



**DN-VS5-22**



**DN-VS5-20**



**DN-VS5-23**



**DN-VS5-21**



**DN-VS5-24**



**DN-VS5-25**



**DN-VS5-27**



**DN-VS5-26**



**DN-VS5-28**



**DN-VS5-29**



**DN-VS5-31**



**DN-VS5-30**



**DN-VS5-32**



**DN-VS5-33**



**DN-VS5-35**



**DN-VS5-34**



**DN-VS5-36**



**DN-VS5-37**



**DN-VS5-39**




**DN-VS5-38**



**DN-VS5-40**



**DN-VS5-41**

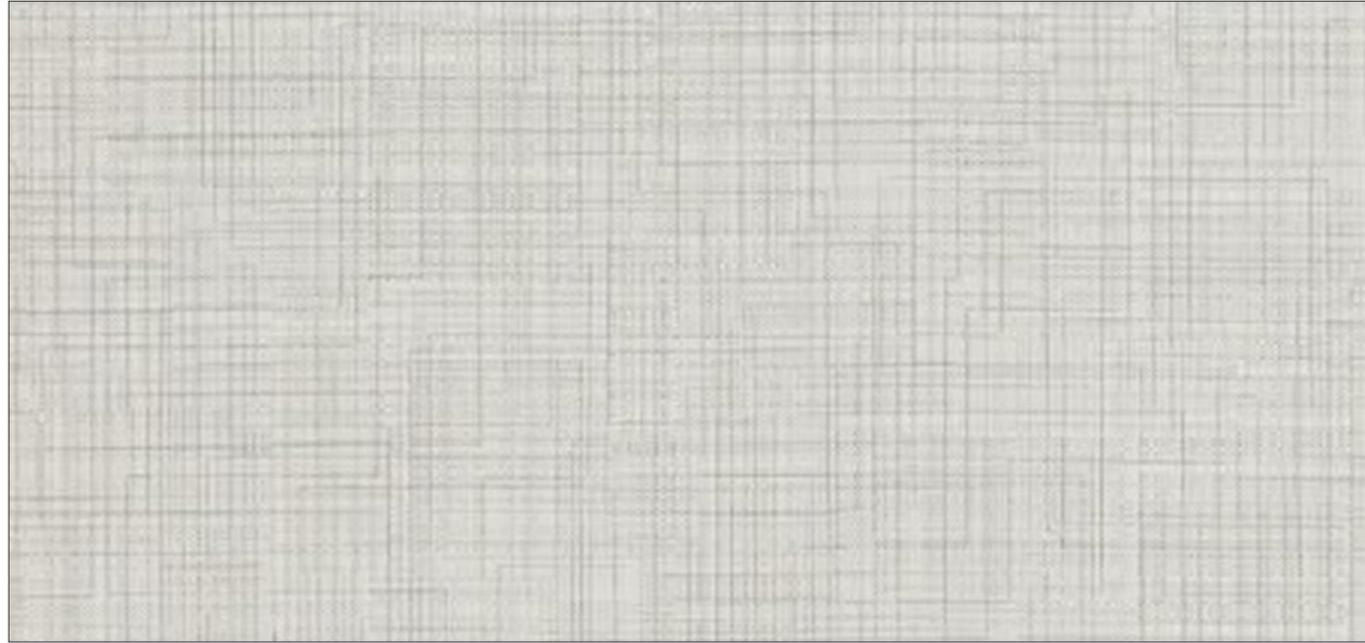

**DN-VS5-43**



**DN-VS5-42**



**DN-VS5-44**




**DN-VS5-45**



**DN-VS5-47**



**DN-VS5-46**

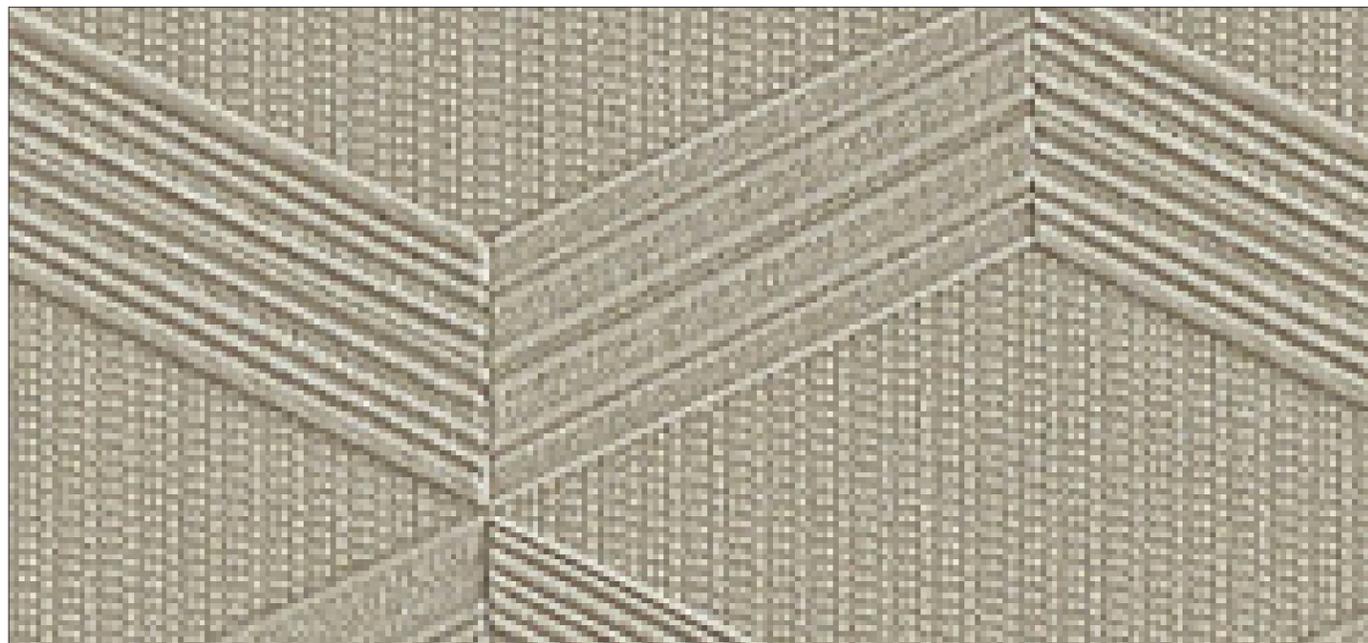

**DN-VS5-48**



**DN-VS5-49**



**DN-VS5-51**



**DN-VS5-50**



**DN-VS5-52**



**DN-VS5-53**



**DN-VS5-55**



**DN-VS5-54**



**DN-VS5-56**



## SPECIFICATIONS

LOW VOC TYPE II

### FIRE HAZARD CLASSIFICATION RESULTS:

Tested in accordance with ASTM E-84 Tunnel Test Class "A"  
Fire Rated.

In addition, this product meets Type II CCC-W-408A  
through D & W-101 requirements for Washability,  
Scrubbability, Abrasion Resistance and Stain Resistance.

### ENVIRONMENT & HEALTH:

Meets California Section 01350 IAQ test requirements for  
wallcovering.

Can contribute to LEED EQ 4.1 point for low-emitting  
materials, adhesives, and sealants, if used with low VOC  
adhesives

Can contribute to LEED MR 5.1 point for regional materials.

### ANTI-MICROBIAL FEATURES:

This product is intended for use in buildings that are prop-  
erly designed and maintained to avoid moisture infiltra-  
tion, condensation and/or accumulation in wall cavities  
and wall surfaces, particularly in warm, humid climates.

### BREATHE FREE MICRO-VENTING AVAILABLE UPON REQUEST:

Breathe Free Micro-vented wallcovering from Denovo Wall can be used to help control  
un-wanted moisture inside a building envelope.

### LIMITED WARRANTY:

5 year warranty against manufacturing defects. Additional information is available at [www.denovowall.com](http://www.denovowall.com)