

Shape Shift Reveal uncovers a new spin on standard felt panels. The top layer is routed out to reveal a different color underneath, providing subtle yet intriguing visual interest to your space. The installation? The world's easiest panel installation: Peel n Stick. Need to cancel even more noise or want a smaller amount of panels? We're a step ahead. Shape Shift has the ability to use our panel standoffs to significantly increase the NRC value.

## Specifying Acoustics never Felt better.

Bringing our legendary innovation, attention to detail, speed, service, and value to PET felt.

# Specifications

Product Name	Shape Shift Reveal
Content	100% Polyester (PET) with a minimum of 60% recycled content
Thickness	24mm
Size	23.5" x 23.5"
Weight	1 lb/per sq ft
Edge Options	Exposed felt
Sound Performance	ASTM C423-17: NRC = 0.50
Fire Performance	Product made from Class A PET felt material tested under ASTM-84
Variations	Felt uses an industry standard felting process. Slight and consistent variations in color and "heathering" should be expected when using this sustainable material. Slight imperfections are within normal manufacturing tolerance and not visible in standard installations.
Environmental	Low VOC emissions, formaldehyde and phenol-free. Red List free.
Maintenance	Vacuum to remove any loose dirt or dust. You may use a soft or plastic bristle brush to loosen it. Avoid excess pressure. Compressed air can also be used to dust the material in difficult or large installations. Stains are present, you may saturate a lint-free cloth with a mild detergent or soap and water solution.
Warranty	10 years
Unit of Sale	Per Unit, minimum order quantity: 8

# Installation

Peel n Stick for the easiest installation or contractor supplied construction adhesive.


# Colors



Heathered Felt colors such as Salt & Pep and Marble used as the back board for Reveal will contain more loose fibers.

# Test Results

Absorption Coefficiency vs. Freq (Hz)

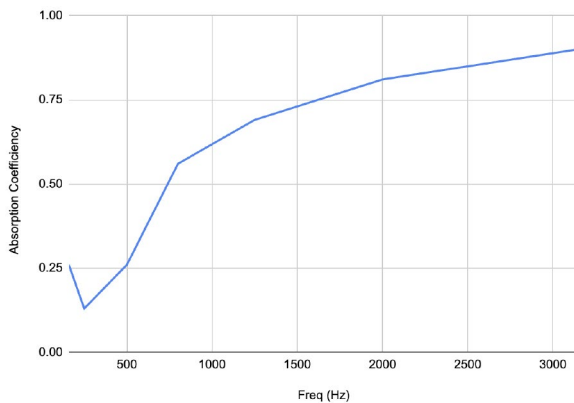

Freq (Hz)	Absorption Coefficiency
160	0.26
250	0.13
500	0.26
800	0.56
1250	0.69
2000	0.81
3150	0.90
<b>NRC</b>	<b>0.50</b>

The Noise Reduction Coefficient (NRC) is calculated as the arithmetic average of the absorption coefficients in the shaded bands only (250, 500, 1250 & 2000 Hz).

ASTM C 423-17: Type A Mounting - Test specimen laid directly against the test to simulate a typical wall installation.

# Designs

