



Slat Attack

Felt Panel

Made using two layers of premium recycled felt, Slat Attack provides the simple textures and color variations that make a room come alive. The 12mm slats are available in four colors and the 22.75" wide sections can be placed end to end to cover large areas. But you need purpose with your polish. We got you. Slat Attack brings a 0.65 NRC!

Specifying Acoustics never Felt better.

Bringing our legendary innovation, attention to detail, speed, service, and value to PET felt.

Your Products & Our Purpose

Craft purposeful and beautiful acoustically absorbent products that help designers and builders easily create spaces that enable people to connect and be at their best.



UNMATCHED
PRODUCT
BREADTH



Made in the USA
At the foothills of the
Rocky Mountains



VACU-
BOND®
FOR SMOOTHER SURFACES
AND CLEANER CORNERS



2X
FASTER THAN
THE COMPETITION



COLLABORATIVE DESIGN
sonus
CUSTOM SHOP
RESEARCH & DEVELOPMENT



START TO FINISH
UP-TO-THE-SECOND
ORDER TRANSPARENCY

Colors

Slats




Backing Board



Test Results

Absorption Coefficiency vs. Freq (Hz)

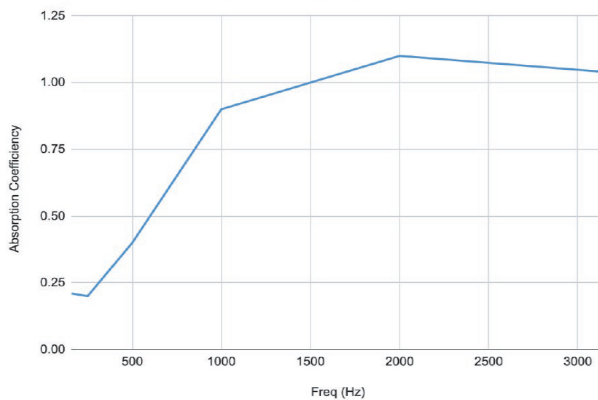




Freq (Hz)	Absorption Coefficiency
160	0.21
250	0.20
500	0.40
800	0.70
1000	0.90
2000	1.10
3150	1.04
NRC	0.65

The Noise Reduction Coefficiency (NRC) is calculated as the arithmetic average of the absorption coefficients in the shaded bands only (250, 500, 1250 & 2000 Hz).

ASTM C 423-17: Type A Mounting - Test specimen laid directly against the test surface to simulate a typical wall installation.

Construction & Hardware

Drywall Screws or Construction Adhesive

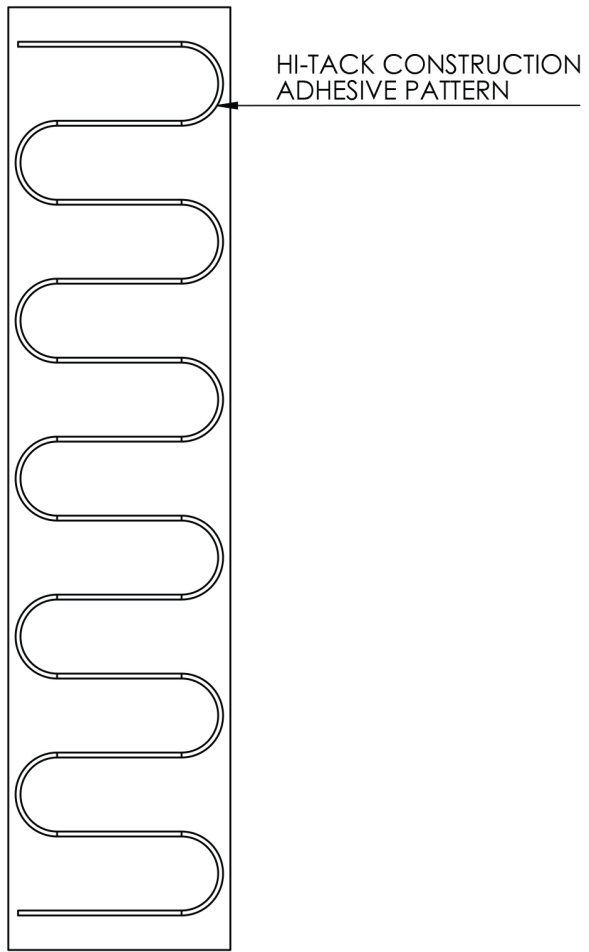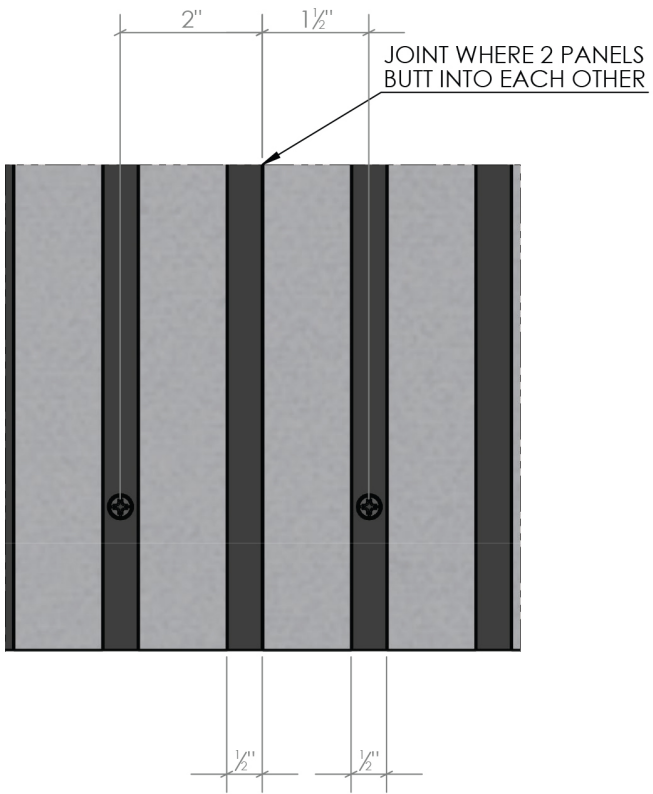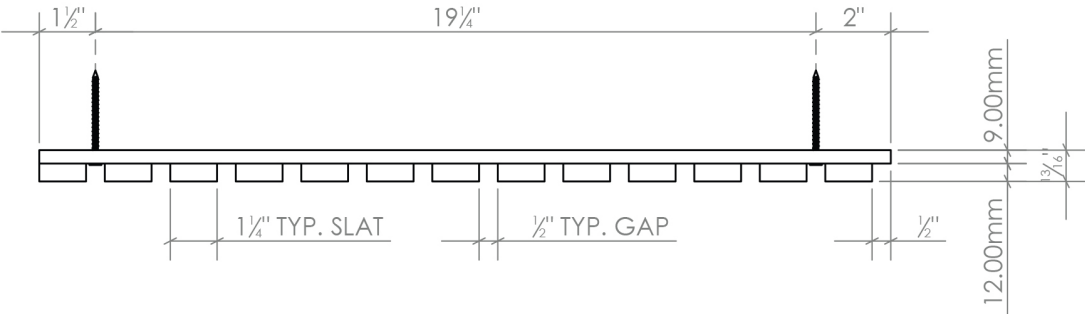

Specifications

Product Name	Slat Attack
Lead Times	Fast Ship: 4 weeks Standard: 10 weeks
Content	100% Polyester (PET) with a minimum of 60% recycled content
Thickness	9 & 12mm
Width	22.75"
Height	95.5"
Depth	9 & 21mm
Weight	.7/lbs per sq ft
Edge Options	Exposed felt
Sound Performance	ASTM C423-17: NRC = 0.60 expected
Fire Performance	Product made from Class A PET felt material tested under ASTM-84
Variations	Sonus Felt uses an industry standard felting process. Slight and consistent variations in color and "heathering" should be expected when using this sustainable material. Slight imperfections are within normal manufacturing tolerance and not visible in standard installations.
Environmental	Low VOC emissions, formaldehyde and phenol-free. Red List free.
Maintenance	Vacuum to remove any loose dirt or dust. You may use a soft or plastic bristle brush to loosen it. Avoid excess pressure. Compressed air can also be used to dust the material in difficult or large installations. If stains are present, you may saturate a lint-free cloth with a mild detergent or soap and water solution.
Warranty	10 years
Unit of Sale	Per section, minimum order quantity: 2