

SPECIFICATION

Collection

NOBLELIN 68-2110/-2114

5 colours from Tapetex 68-Linen

Physical properties	
Surface	100% Linen, dobby woven and yarn dyed.
Composition	Paper backing of 70% woodpulp reinforced with 30% polyester.
Backing	137 cm = 54"
Width	Approx. 520 gr/lm = 16.8 oz/lyd
Weight	Approx. 0.70 mm
Thickness	Random.
Hanging	Precision trimmed for butt-joining by professional paper
	hangers. Installation advice supplied with every roll.
Adhesive	Adhesive Tapetex PRO-1 or similar premixed heavy duty, clear vinyl
	adhesive, suitable for textile wallcovering.
Variation	There can be a variation between sample material and finished product.
	Stock cuttings are available for approval.
Performance	See detailed results on our website.
Performance Surface finish	A stain repellent finish prevents waterbased splashes penetrating
	A stain repellent finish prevents waterbased splashes penetrating and staining the material.
	A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building
Surface finish	A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface.
Surface finish Lightfastness	A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface. Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest.
Surface finish Lightfastness LRV values	A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface. Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest. Testing as per BS 8493:2008+A1:2010, Datacolor DC500.
Surface finish Lightfastness LRV values Fire rating	A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface. Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest. Testing as per BS 8493:2008+A1:2010, Datacolor DC500. ASTM E84 Class A and EUROCLASS.
Surface finish Lightfastness LRV values Fire rating Permeability rating	A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface. Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest. Testing as per BS 8493:2008+A1:2010, Datacolor DC500. ASTM E84 Class A and EUROCLASS. ASTM E96-12, Method B, Water Vapor Transmission.
Surface finish Lightfastness LRV values Fire rating	A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface. Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest. Testing as per BS 8493:2008+A1:2010, Datacolor DC500. ASTM E84 Class A and EUROCLASS. ASTM E96-12, Method B, Water Vapor Transmission. ASTM D6196, D5197 and D5116, Environmental Chamber Test.
Surface finish Lightfastness LRV values Fire rating Permeability rating	A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface. Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest. Testing as per BS 8493:2008+A1:2010, Datacolor DC500. ASTM E84 Class A and EUROCLASS. ASTM E96-12, Method B, Water Vapor Transmission.

Sustainability

Linen is made from a plant, a 100% renewable natural resource.

The backing is FSC certified, FSC A000531.

In production, all energy sources are either green, wind or hydro based and all processes are waterbased. The products do not contain PVC, chlorine, plasticizers, heavy metals or harmful dyes.

Supply and packing


Delivery from stock by the full linear meter or full linear yard. The average piece length of this quality is approx. 50 linear meter or 55 linear yards. However, as is common within the textile industry, it is not possible to establish a standard roll length. The wallcovering is reeled on to a cardboard core, wrapped in polyethylene and protective end caps are fixed. Each roll is then packed in individual cardboard boxes or tubes, which are also made out of FSC certified woodpulp.

Harmonized System as per the World Customs Organization and Origin

Textile Wallcovering, paper backed: 5905.00. Made in the Netherlands.



tapetex wall materials

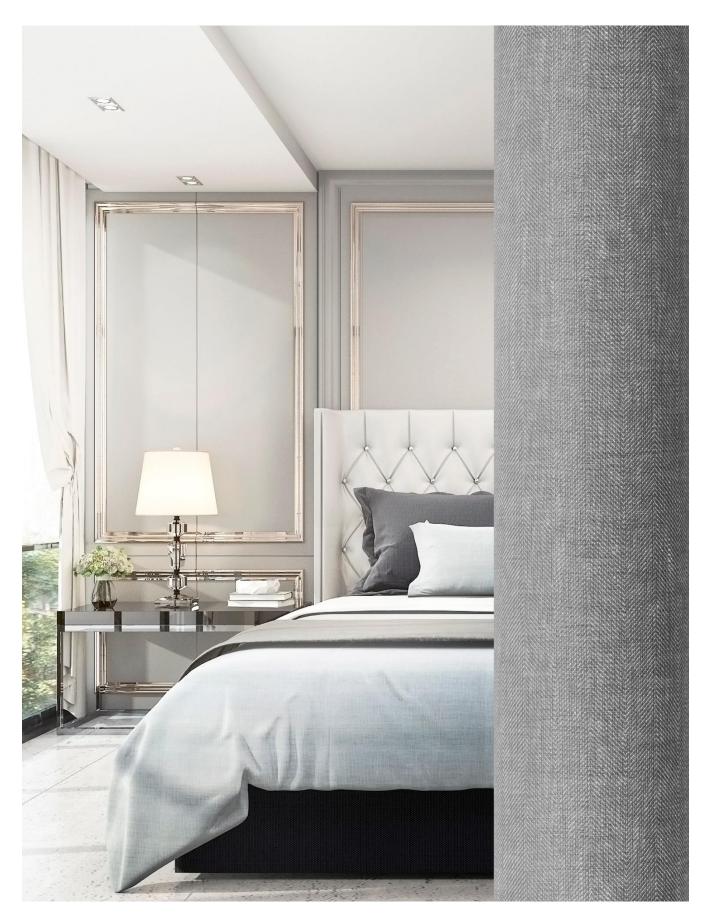



(440) 248-0000

6655 parkland boulevard solon, ohio 44139 (440) 519-1950 fax www.surfacematerials.com