

SPECIFICATION

PURALIN 68-2060/-2064

Collection 5 colours from Tapetex 68-Linen

Physical properties

Surface	100% Linen, dobby woven and piece dyed.
Composition	Paper backing of 70% woodpulp reinforced with 30% polyester.
Backing	137 cm = 54"
Width	Approx. 800 gr/lm = 25.8 oz/lyd
Weight	Approx. 0.90 mm
Thickness	Random or on approx. repeat 71.5 cm (28.1") x 6.5 cm (2.6") wide.
Hanging	Align at eye-level if there are minor deviations in the joining of the fabric. Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.
Adhesive	Adhesive Tapetex PRO-1 or similar premixed heavy duty, clear vinyl adhesive, suitable for textile wallcovering.
Variation	There can be a variation between sample material and finished product. Stock cuttings are available for approval.

Performance

See detailed results on our website.

Surface finish	A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface.
Lightfastness	Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest.
LRV values	Testing as per BS 8493:2008+A1:2010, Datacolor DC500.
Fire rating	ASTM E84 Class A and EUROCLASS.
Permeability rating	ASTM E96-12, Method B, Water Vapor Transmission.
Indoor air quality	ASTM D6196, D5197 and D5116, Environmental Chamber Test. The testing followed UL 2821 "Greenguard Certification Program Method for Measuring and Evaluating Chemical Emissions".

Sustainability


Linen is made from a plant, a 100% renewable natural resource.
The backing is FSC certified, FSC A000531.
In production, all energy sources are either green, wind or hydro based and all processes are waterbased. The products do not contain PVC, chlorine, plasticizers, heavy metals or harmful dyes.

Supply and packing

Delivery from stock by the full linear meter or full linear yard. The average piece length of this quality is approx. 30 linear meter or 33 linear yards. However, as is common within the textile industry, it is not possible to establish a standard roll length. The wallcovering is reeled on to a cardboard core, wrapped in polyethylene and protective end caps are fixed. Each roll is then packed in individual cardboard boxes or tubes, which are also made out of FSC certified woodpulp.

Harmonized System as per the World Customs Organization and Origin

Textile Wallcovering, paper backed: 5905.00. Made in the Netherlands.

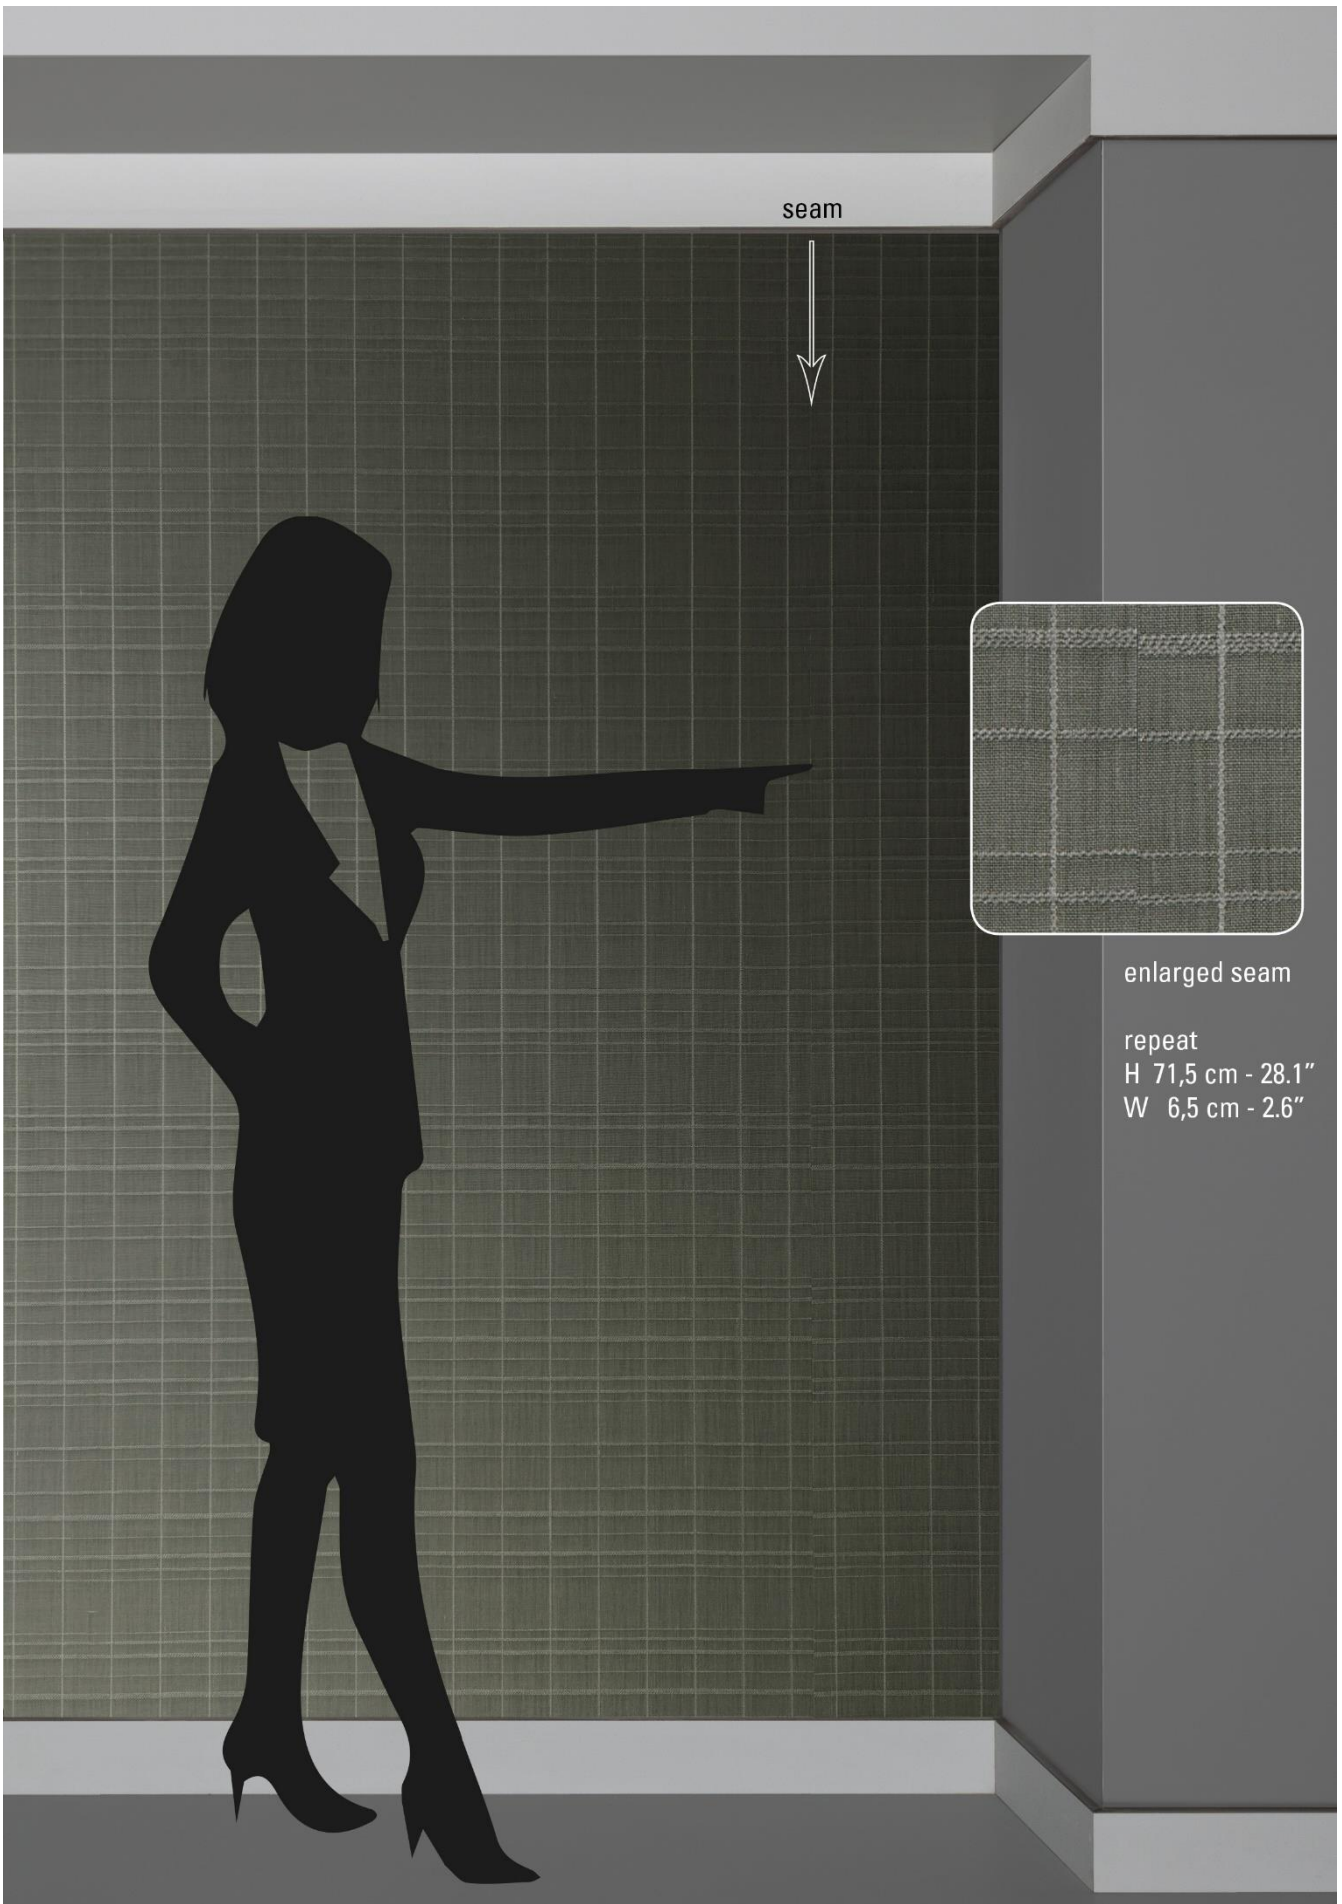

seam



enlarged seam

repeat
H 71,5 cm - 28.1"
W 6,5 cm - 2.6"

