

Suspended Baffle Panels

Our suspended array of flat rectangle baffles are perfect for large open spaces requiring style and acoustical function. Be creative with different sizes and colors to create an appearance of a multi-dimensional design in the ceiling.

Features

- Two-part designs offered in 1", 2", and 4" thicknesses to manage the most difficult spaces, these lightweight and durable substrates consist of highest quality rigid 6-7lb fiberglass board
- Simple suspended applications that can be configured for any ceiling application. For added flexibility, the suspension hardware is up to the designer or installer.
- Recommended spacing ranges from 12"-24" depending on space requirements. Our substrate offers superior sound control over felt applications and requires less density positioning.

| Size | 2' x 4', 4' x 4', 4' x 6' (custom size available) | | | | |
|-------------------|---|--|--|--|--|
| Thickness | 1" or 2" | | | | |
| Tolerance | +/- 1/16" | | | | |
| Core | 6-7lb Fiberglass Board | | | | |
| Edge Detail | Hardened | | | | |
| Edge Profile | Square | | | | |
| Mounting Type | Ceiling - Hanging | | | | |
| Mounting Hardware | Eye Hooks pre-installed | | | | |
| Flamability | ASTM 84 Class A | | | | |
| NRC | From .80 – 1.05, depending upon: The surface material and cloud or baffle thickness | | | | |

Our craftsmanship guarantee is really simple:

If there is a craftsmanship defect detected, we will repair or replace the impacted product.

If the product was damaged during shipping and it was because of how we packaged it, we will repair or replace the impacted product.

The length of our guarantee is five (5) years provided you used a Certified PRO Installer; otherwise, it is a standard three (3) years.

For more details, see warranty details on our website.

Lead Time


Standard sizes and coverings: 2-3 weeks Custom sizes and coverings: 6-8 weeks


* any customer supplied coverings may require additional time for delivery and testing. Additionally, wood veneers require perforation. Any wood veneers not in stock require an additional 4-6 weeks.


Custom Shop

Need something unique? Want to co-create actionable solutions that improve the human experience? We believe, TOGETHER, we can ideate, design, and build solutions that create unique experiences. Call us to discuss our Custom Shop program.



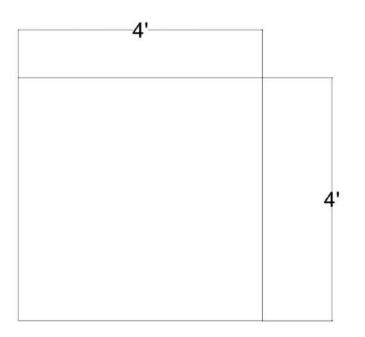

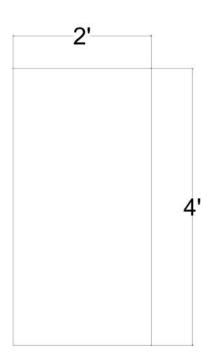

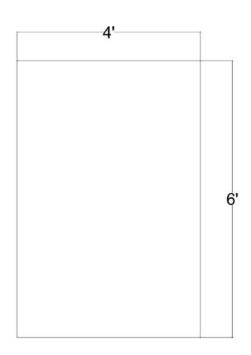

Sound Absorption

| Hz | 125 | 250 | 500 | 1000 | 2000 | 4000 | N.R.C |
|--------|-----|-----|------|------|------|------|-------|
| DAP-1" | .02 | .37 | .87 | 1.09 | 1.01 | 1.00 | .85 |
| DAP-2" | .21 | .78 | 1.04 | 1.07 | 1.06 | 1.04 | 1.05 |

Standard













Quarry Blue 2335-2026-GOM-STD



Onyx 2334-20116-GOM-STD



Graphite 2758-2375-COM-STD



Shade 2758-2372-GOM-STD



Pumpkin 2335-2021-GOM-STD

Premium

Premium fabrics may require special order. Additional lead times and charges apply



Talc W16952-O2-Knoll-PRM



Target W884-10A-Knoll-PRM



Sterling W884-3A-Knoll-PRM



Electrum W169510-10-Knoll-PRM



Monitors and printers vary. Please request a material sample to verify materials and colors.