



## Fabric & Dimensional Cloud

Fabric

The trusted classic. We love the simplicity of our functional fabric-wrapped acoustic clouds. Call it like it is, right? A cost-effective and known solution to controlling sound in any space, these come in various standard sizes and are offered in several thickness options to accommodate all budgets.

## Don't Mess with A Good Thing, Perfect It.

Meticulously crafted like your future depends on it, because it does.

### Your Products & Our Purpose

Craft purposeful and beautiful acoustically absorbent products that help designers and builders easily create spaces that enable people to connect and be at their best.



UNMATCHED  
PRODUCT  
BREADTH

Made in the USA



At the foothills of the  
Rocky Mountains

VACU-  
BOND®

FOR SMOOTHER SURFACES  
AND CLEANER CORNERS

2X

FASTER THAN  
THE COMPETITION



START TO FINISH  
UP-TO-THE-SECOND  
ORDER TRANSPARENCY



surface materials

The ultimate in interior finish products.

(440) 248-0000

6655 parkland boulevard  
solon, ohio 44139  
(440) 519-1950 fax  
www.surfacematerials.com



# Specifications

<b>Product Name</b>	Fabric Cloud or Dimensional Cloud
<b>Shape</b>	Rectangles, circles, squares, hexagons, triangles. Custom shapes available.
<b>Dimensional Designs</b>	Aspen, Currents, Dunes, Infinity, Linear, Ripple, Sand Dunes, Silhouettes, Steps, Wave
<b>Content</b>	6–7lb fiberglass board with optional tackable & high-impact resistant facers, 100% post-consumer recycled polyester fabric
<b>Thickness</b>	2" and 4"
<b>Unit Width</b>	Up to 60"
<b>Unit Height</b>	Up to 120"
<b>Weight</b>	2" = 1.6 lbs/ sq ft, 4" = 3 lbs/sq ft
<b>Edge Options</b>	Square or Beveled
<b>Sound Performance</b>	ASTM C423-17: NRC 0.80–1.31
<b>Fire Performance</b>	ASTM 84 Class A
<b>Environmental</b>	Low VOC emissions, woven fabrics are FR (Flame Retardant) free and compliant with CAL AB 2998.
<b>Maintenance</b>	Vacuum to remove any loose dirt or dust. You may use a soft or plastic bristle brush to loosen it. Avoid excess pressure. Compressed air can also be used to dust the material in difficult or large installations. Remove ordinary dirt and smudges with a mild soap and water solution and a clean, soft cloth or towel. Dry with a soft lint-free cloth or towel. A melamine magic eraser can be used for more difficult stains. Always apply any cleaning methods to a small area first to test effectiveness and result.
<b>Warranty</b>	5 years
<b>Unit of Sale</b>	Per unit

# Construction & Hardware



Rotofast Cloud Anchor

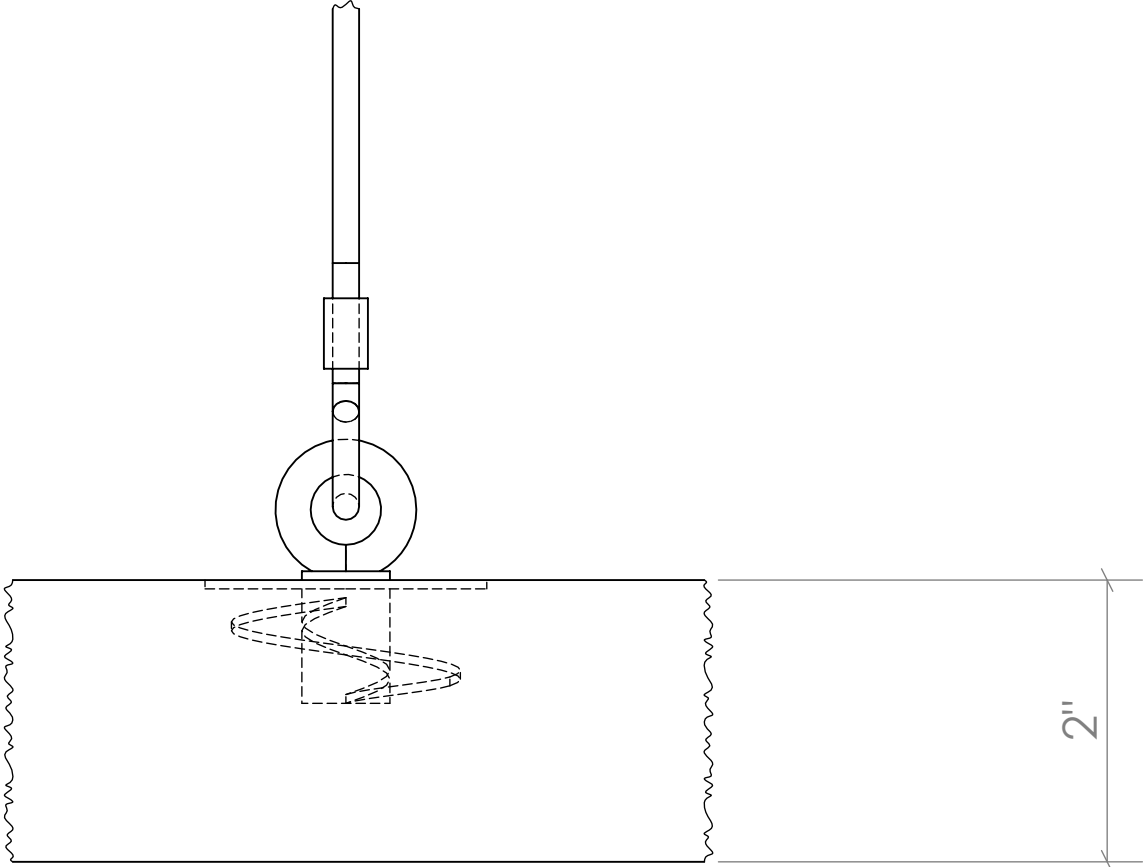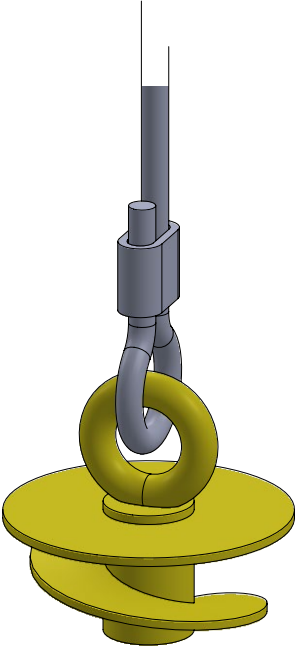

# Colors


We currently offer over 40 standard colors thanks to our partnership with Burch. See our Standard Fabrics document on the next page for a complete listing.

We also carry a wide array of other acoustic fabrics and colors by Guilford of Maine, Knoll, Maharam, and more.

# Test Results

## 2" Fabric Cloud

Absorption Coefficient vs. Freq (Hz)

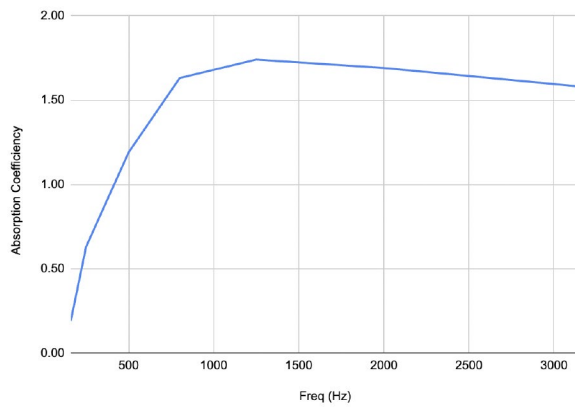

Freq (Hz)	Absorption Coefficient
160	0.19
250	0.63
500	1.19
800	1.63
1250	1.74
2000	1.69
3150	1.58
<b>NRC</b>	<b>1.31</b>

The Noise Reduction Coefficient (NRC) is calculated as the arithmetic average of the absorption coefficients in the shaded bands only (250, 500, 1250 & 2000 Hz).

ASTM C 423-17: Type J Mounting - using 6 cloud units suspended with aircraft wire to simulate a typical baffle installation.


## Prime Time



Tangerine




Paprika



Shiraz



Scarlet



Fuchsia



Violet



Admiral




Marina



Azure



Peacock



Tropic



Chambray



Aloe




Key Lime



Spring



Spruce




Brownie




Jet Black



Shale



Elephant



Cinder



Parchment



Mink



Sterling



Chino




Lunar




Stucco



Silverado



Shark



Granite




Academy



Cerulean



Bluestone



Delft



Lichen



Shamrock



Fairway



Ray



Copper



Woodrose



Bloom



Printable