




ModeAcousticFeltWall Reveal





Mode Acoustic Felt Wall Reveal uncovers a new spin on standard felt panels. The top layer is routed out to reveal a different color underneath, providing subtle yet intriguing visual interest to your space. The installation? The world's easiest panel installation: Mode Peel n Stick. Need to cancel even more noise or want a smaller amount of panels? We're a step ahead. Mode Acoustic Felt Wall Reveal has the ability to use our panel standoffs to significantly increase the NRC value.

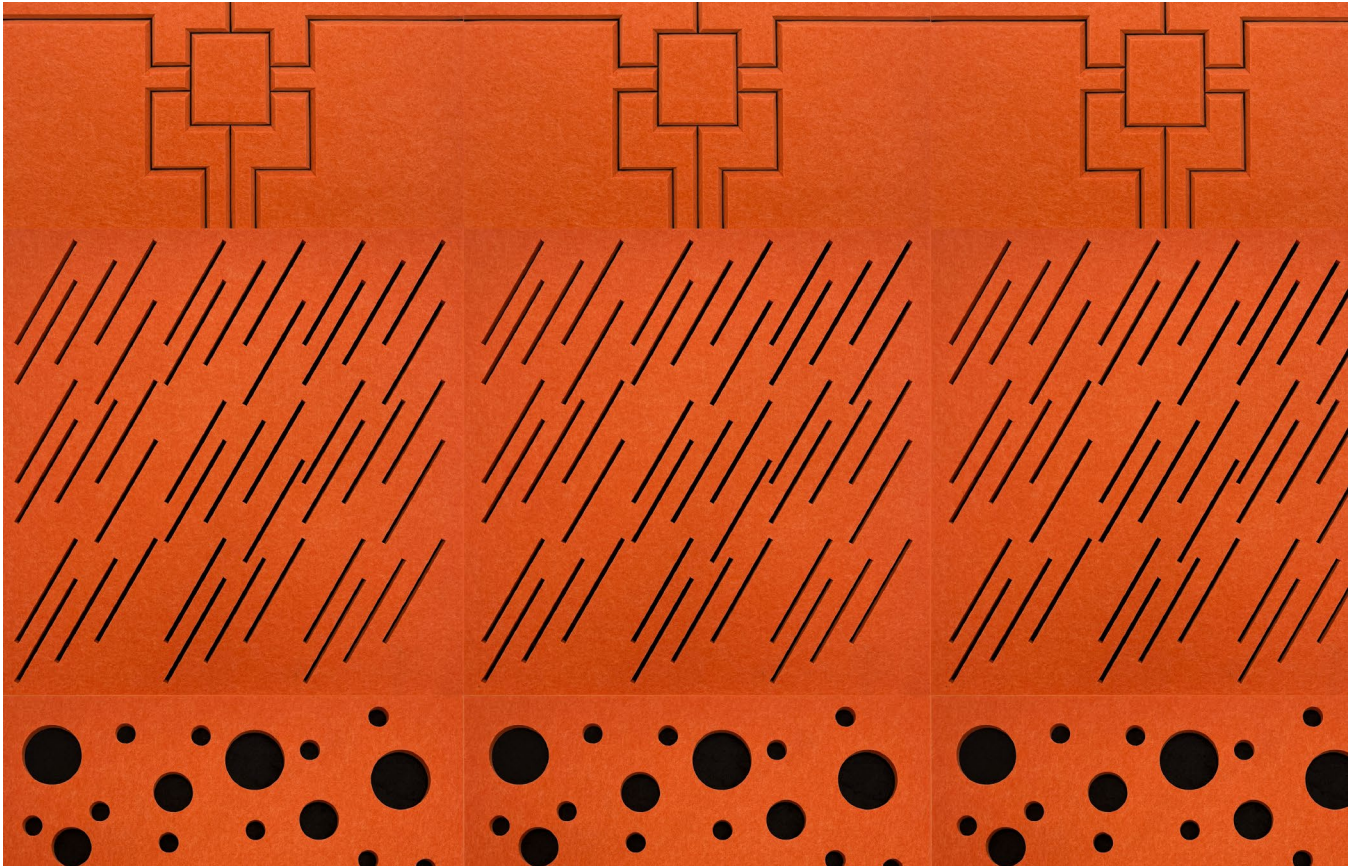

Specifications

Product	Mode Acoustic Felt Wall Reveal: Polka, Torrent, and Diode
Content	100% Polyester (PET) with a minimum of 60% recycled content
Thickness	24mm
Size	23.5" x 23.5"
Weight	.7 lbs/per sq ft
Edge Options	Exposed felt
Sound Performance	ASTM C423-17: NRC = 0.50
Fire Performance	Product made from Class A PET felt material tested under ASTM-84
Variations	Mode Felt uses an industry standard felting process. Slight and consistent variations in color and "heathering" should be expected when using this sustainable material. Slight imperfections are within normal manufacturing tolerance and not visible in standard installations.
Environmental	Low VOC emissions, formaldehyde and phenol-free. Red List free.
Maintenance	Vacuum to remove any loose dirt or dust. You may use a soft or plastic bristle brush to loosen it. Avoid excess pressure. Compressed air can also be used to dust the material in difficult or large installations. If stains are present, you may saturate a lint-free cloth with a mild detergent or soap and water solution.
Warranty	10 years
Unit of Sale	Per unit, minimum order quantity: 8


Designs

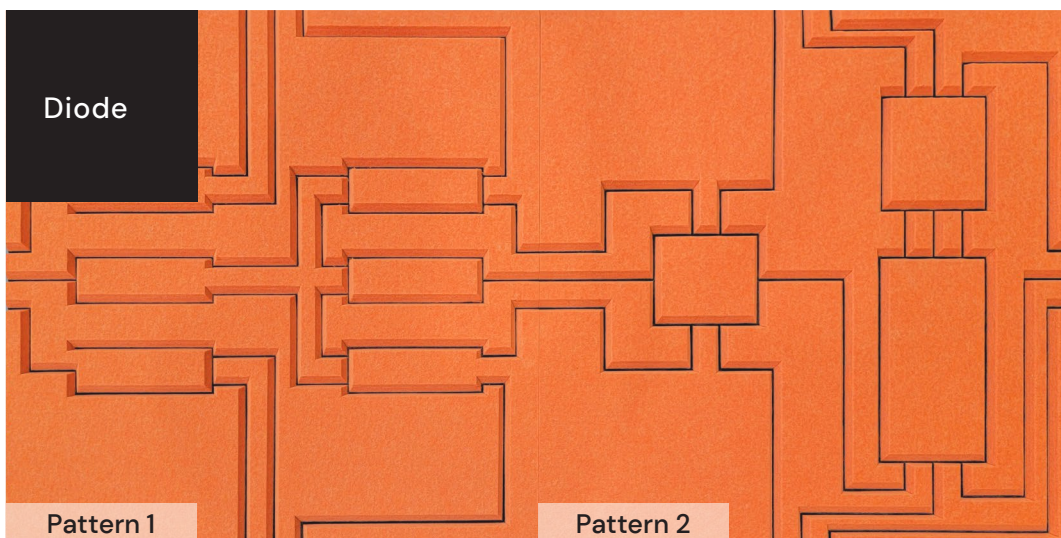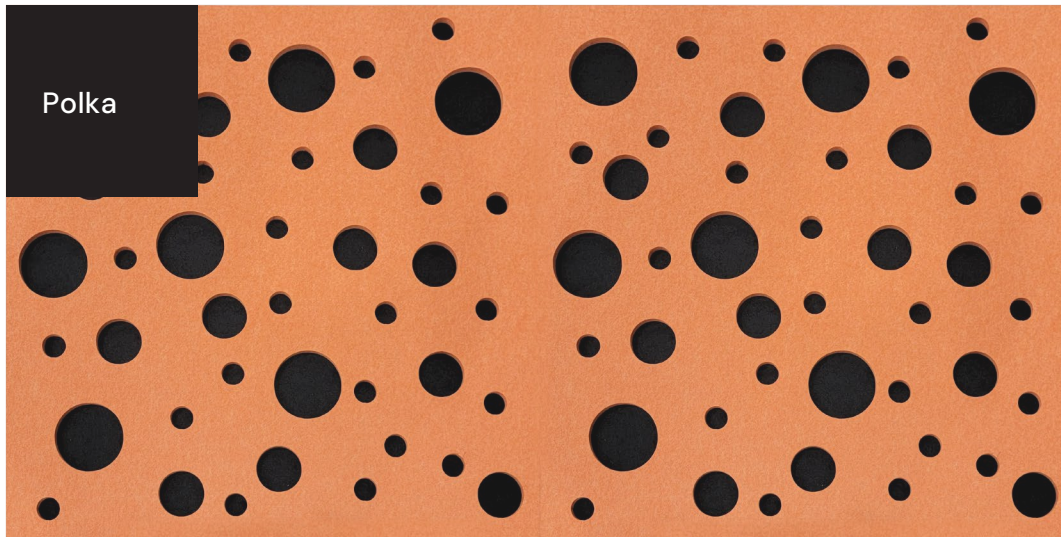

Installation

Mode Peel n Stick for the easiest installation or contractor supplied construction adhesive.

Test Results

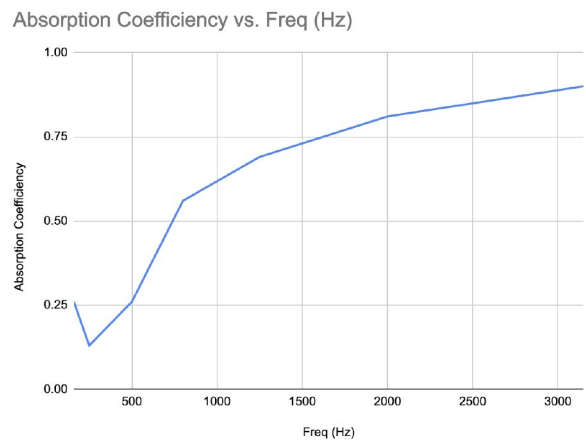

Freq (Hz)	Absorption Coefficiency
160	0.26
250	0.13
500	0.26
800	0.56
1250	0.69
2000	0.81
3150	0.90
NRC	0.50

The Noise Reduction Coefficiency (NRC) is calculated as the arithmetic average of the absorption coefficients in the shaded bands only (250, 500, 1250 & 2000 Hz).

ASTM C 423-17: Type A Mounting – Test specimen laid directly against the test to simulate a typical wall installation.


Standard Colors

acoustic felt

Mode Acoustic Felt

Reference Card

To request a felt tip card or replacement swatches, please email: hello@modeacoustic.com

FROST mode-01	SMOKE mode-02	SLATE mode-03	WHITE OAK mode-oak	SAND mode-13	TOAST mode-14
PEBBLE mode-04	ASH mode-05	GRAPHITE mode-06	BIRCH mode-birch	FLAME mode-15	SUNSET mode-16
DUSK mode-07	SLATE BLUE mode-08	GROVE mode-09	BARN WOOD mode-barn	HARVEST mode-17	MEADOW mode-18
ARCTIC mode-10	DEEP mode-11	INK mode-12	WALNUT mode-walnut		

modeacoustic.com | 800.222.1028 | hello@modeacoustic.com

Special Order

SUNFLOWER	SWEET PEA	GREEN BEAN	70'S DARK WASH	80'S ACID WASH	90'S FADED
TANGERINE	CAPPUCCINO	LATTÉ	SALT & PEP	MARBLE	SNOW
ESPRESSO	ENZO	CHARCOAL	SHADOW		