



Mode Acoustic Felt Wall Step



Bring multidimensional, reverb-crushing modern design to your walls with Mode Acoustic Felt Wall Step. Measuring eight feet tall, the 36" wide sections contain hollow channels, or ribs, allowing for up to three colors. Felt is best when it has space to breathe. Felt Step attenuates noise as it enters into the ribs and then again once the frequencies are inside the chamber. Numbers don't lie: regular wall panels typically have an NRC rating of 0.60 or less, Felt Step though comes in at 1.05! Meaning you can use less square footage while gaining the aesthetic benefits.










Specifications

| | |
|--|--|
| Product Name | Mode Acoustic Felt Wall Step |
| Content | 100% Polyester (PET) with a minimum of 60% recycled content |
| Thickness | 12mm |
| Width | 36.25" |
| Height | 47.5", 59.5", 95.5" |
| Max Depth | 3.75" |
| Weight | 1.0 lbs per sq ft |
| Edge Options | Exposed felt |
| Sound Performance | ASTM C423-17: NRC = 1.05 |
| Fire Performance | Product made from Class A PET felt material tested under ASTM-84 |
| Mode Felt uses an industry standard felting process. Slight and consistent variations in color and "heathering" should be expected when using this sustainable material. Slight imperfections are within normal manufacturing tolerance and not visible in standard installations. | |

| | |
|---------------|---|
| Environmental | Low VOC emissions, formaldehyde and phenol-free. Red List free. |
| Maintenance | Vacuum to remove any loose dirt or dust. You may use a soft or plastic bristle brush to loosen it. Avoid excess pressure. Compressed air can also be used to dust the material in difficult or large installations. If stains are present, you may saturate a lint-free cloth with a mild detergent or soap and water solution. |
| Warranty | 10 years |
| Unit of Sale | Per section, minimum order quantity: 2 |

Construction & Hardware

Z Clip to Z Bar

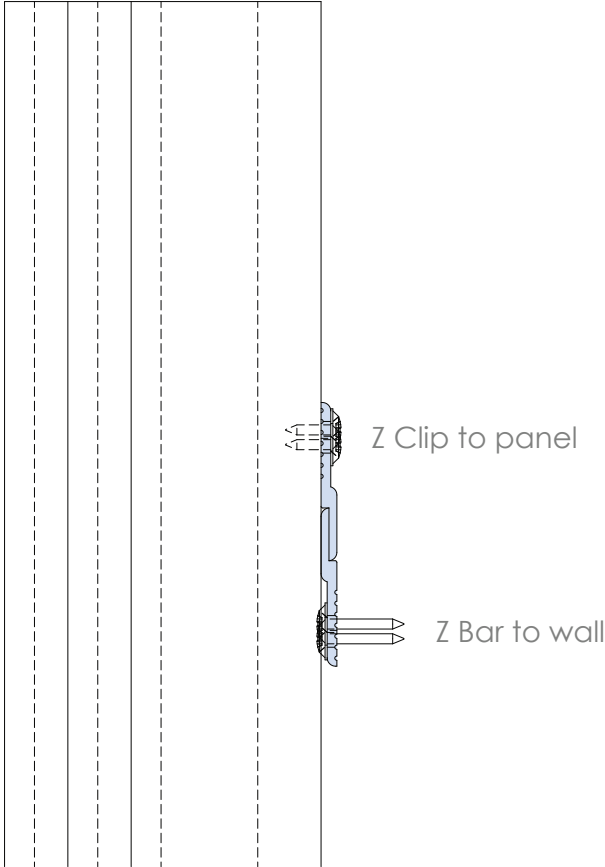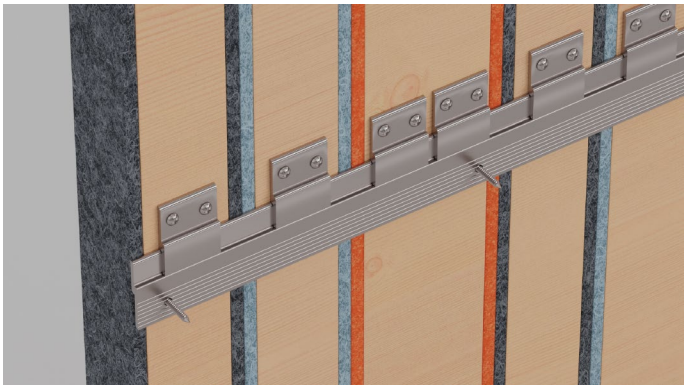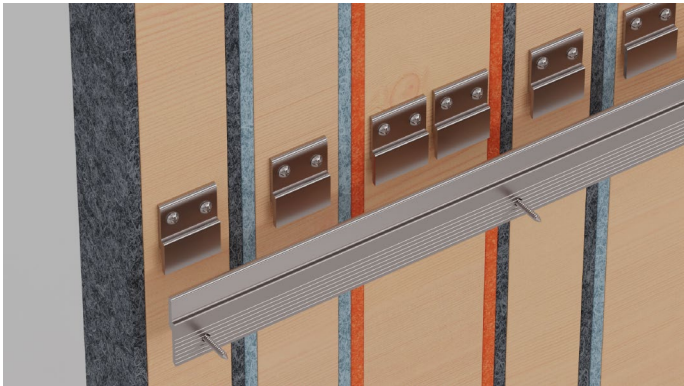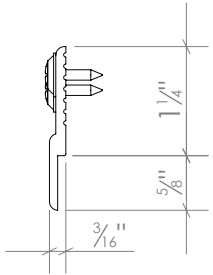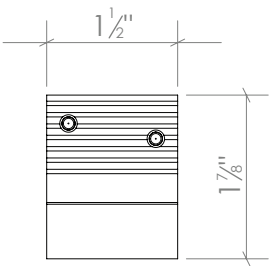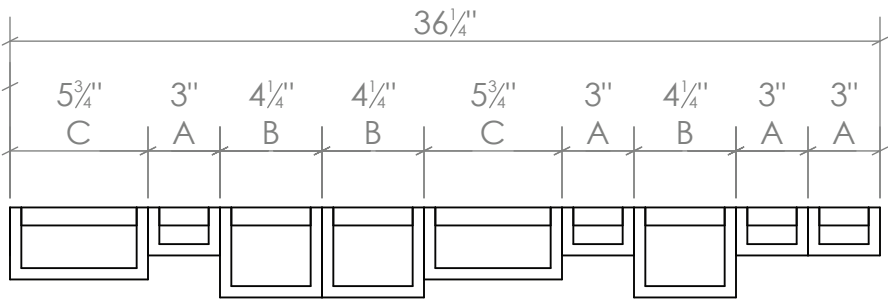

Standard Colors



Special Order

