



Rockin' Roll

Felt Baffle

Rockin' Roll can be described in one word: calm. The flowing lines, the single slab construction, and of course the acoustic properties to wash away all distractions. It's our version of sitting in a big rocking chair on a cool summer day or gently rolling along in a brand new boat. And if we do our jobs correctly, with our instant consultations and super speedy lead times, you might just get to take the day off to enjoy some of that serenity.

Specifying Acoustics never Felt better.

Bringing our legendary innovation, attention to detail, speed, service, and value to PET felt.

Your Products & Our Purpose

Craft purposeful and beautiful acoustically absorbent products that help designers and builders easily create spaces that enable people to connect and be at their best.



UNMATCHED
PRODUCT
BREADTH

Made in the USA



At the foothills of the
Rocky Mountains

VACU-
BOND®

FOR SMOOTHER SURFACES
AND CLEANER CORNERS

2X

FASTER THAN
THE COMPETITION



START TO FINISH
UP-TO-THE-SECOND
ORDER TRANSPARENCY

Specifications

Product Name	Rockin' Roll
Content	100% Polyester (PET) with a minimum of 60% recycled content
Thickness	12mm
Size	96" x 96" x 13"
Weight	.34/lbs per sq ft
Edge Options	Exposed felt
Sound Performance	ASTM C423-17: NRC = 0.80
Fire Performance	Product made from Class A PET felt material tested under ASTM-84
Variations	Sonus Felt uses an industry standard felting process. Slight and consistent variations in color and "heathering" should be expected when using this sustainable material. Slight imperfections are within normal manufacturing tolerance and not visible in standard installations.
Environmental	Low VOC emissions, formaldehyde and phenol-free. Red List free.
Maintenance	Vacuum to remove any loose dirt or dust. You may use a soft or plastic bristle brush to loosen it. Avoid excess pressure. Compressed air can also be used to dust the material in difficult or large installations. If stains are present, you may saturate a lint-free cloth with a mild detergent or soap and water solution.
Warranty	10 years
Unit of Sale	Per Unit

Price



Snap the QR Code or visit sonusna.com to see pricing.

Sonus is the only manufacturer to have published universal pricing because:


- 1) We got nothing to hide.
- 2) We are here for *you*: faster, easier, straightforward.

Sonus creates the perfect experience for each person in any moment.

Colors



Test Results

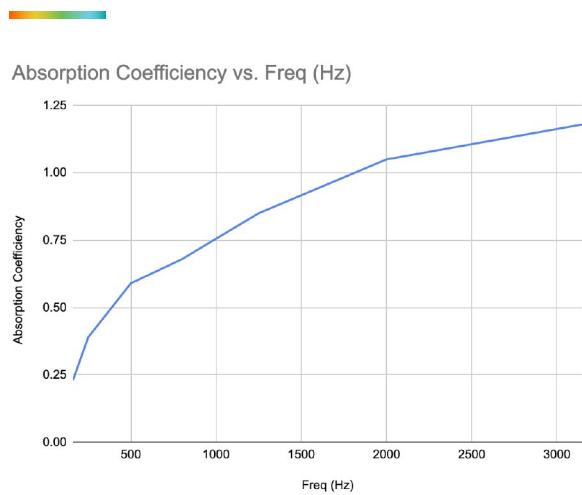

Freq (Hz)	Absorption Coefficient
160	0.23
250	0.39
500	0.59
800	0.68
1250	0.85
2000	1.05
3150	1.18
NRC	0.80

The Noise Reduction Coefficient (NRC) is calculated as the arithmetic average of the absorption coefficients in the shaded bands only (250,500, 1250 & 2000 Hz).


ASTM C 423-17: Type J Mounting - using 4 baffle units suspended with aircraft wire. 12" oc to simulate a typical baffle installation.

Installation




OPTION 1

Allthread to unistrut

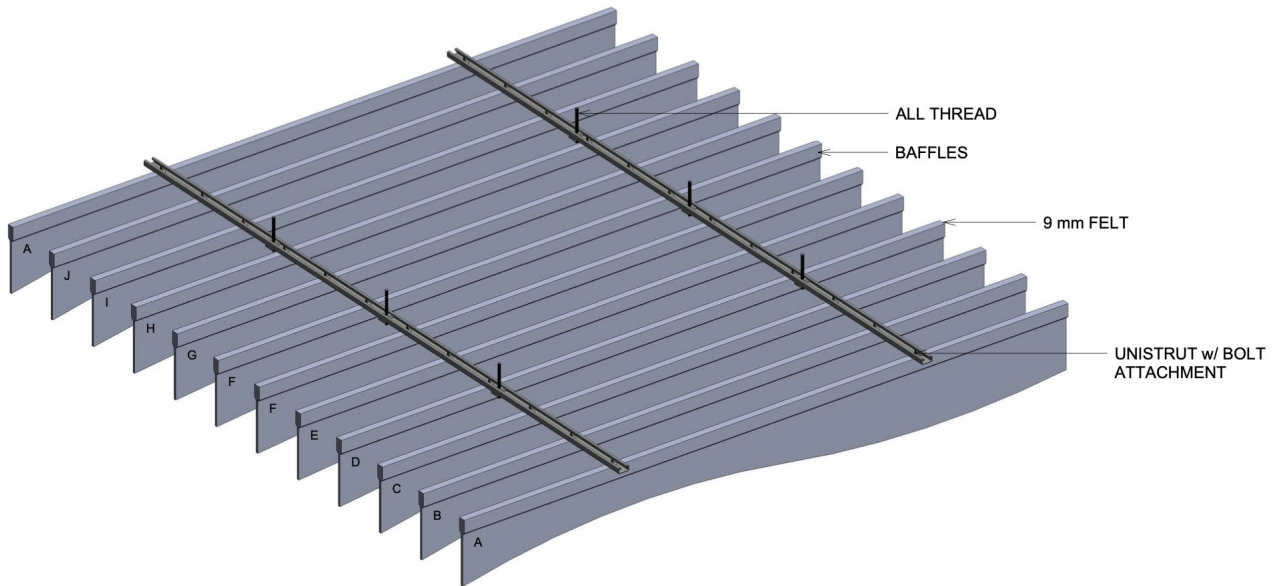

OPTION 2

Suspension cables to unistrut

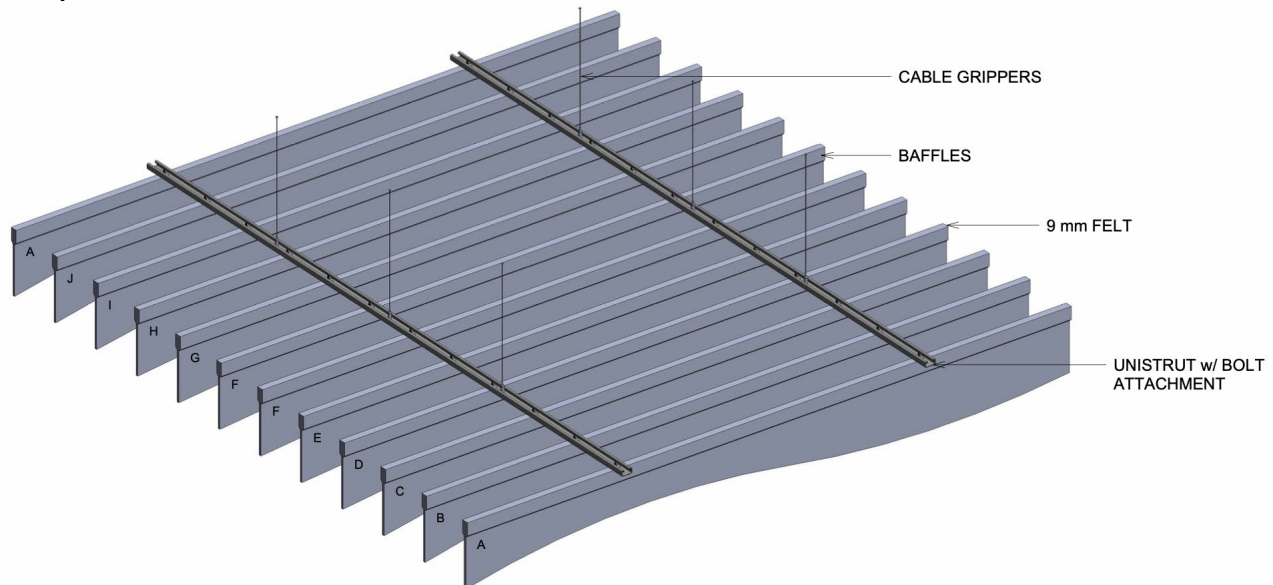

Design

