



Slat Attack

Felt Panel

Made using two layers of premium recycled felt, Slat Attack provides the simple textures and color variations that make a room come alive. The 12mm slats are available in four colors and the 22.75" wide sections can be placed end to end to cover large areas. But you need purpose with your polish. We got you. Slat Attack brings a 0.65 NRC!

Specifying Acoustics never Felt better.

Bringing our legendary innovation, attention to detail, speed, service, and value to PET felt.

Your Products & Our Purpose

Craft purposeful and beautiful acoustically absorbent products that help designers and builders easily create spaces that enable people to connect and be at their best.



UNMATCHED
PRODUCT
BREADTH

Made in the USA



At the foothills of the
Rocky Mountains

**VACU-
BOND®**

FOR SMOOTHER SURFACES
AND CLEANER CORNERS

2X

FASTER THAN
THE COMPETITION



START TO FINISH
UP-TO-THE-SECOND
ORDER TRANSPARENCY



surfacematerials

The ultimate in interior finish products.


(440) 248-0000

6655 parkland boulevard
solon, ohio 44139
(440) 519-1950 fax
www.surfacematerials.com

Construction & Installation


Drywall Screws

- Using like-colored screws for the backer board, screw directly to the wall through the acoustic felt.
- Make sure to use drywall anchors if no joist or stud exists behind the gypsum board. If installing on the ceiling, screw directly to joists/studs.
- We recommend a minimum of 10 screws per panel, $\approx 24"$ oc vertically and between the 1st and second slat on either side.

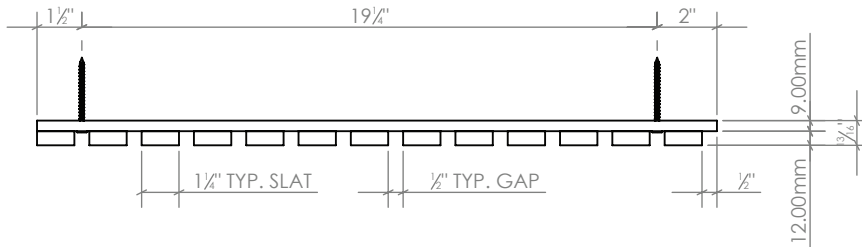

Construction Adhesive


- Use a hi-tack construction adhesive. See pattern below for applying glue to the back of the panel.
- Apply and hold for 30–45 seconds; let cure for 24 hrs.

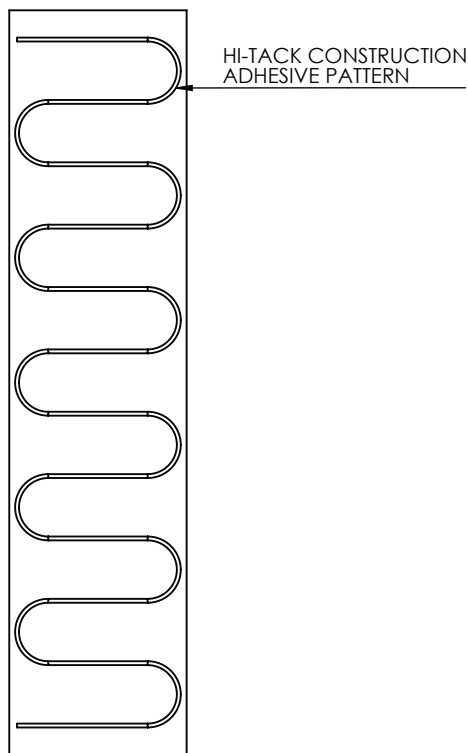

Peel n Stick

- If ordered with Peel n Stick, simply peel back the cover sheet and apply to the wall.
- We recommend a laser level to ensure application is straight on the first attempt. Removing it is difficult and will require heat.

Sequencing

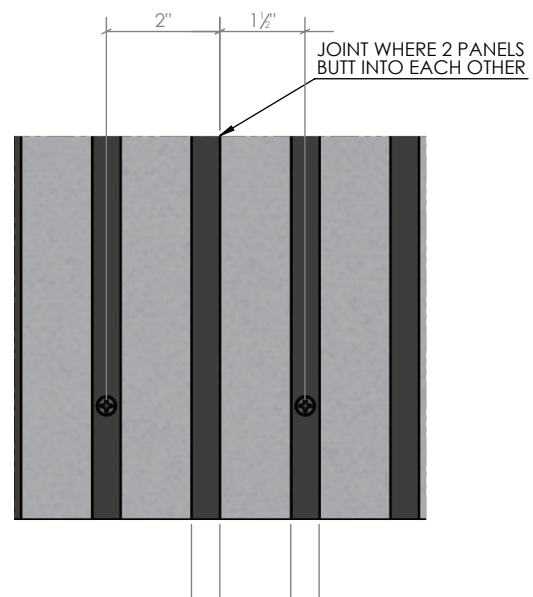


Construction & Installation

Peel n Stick


Leave the hardware, screws, drills, and whatever else in the drawer! Peel n Stick is a double-sided press-on adhesive specifically designed for Sonus products! To adhere, simply make a level line guide, press-on planks & go!

Colors

Slats

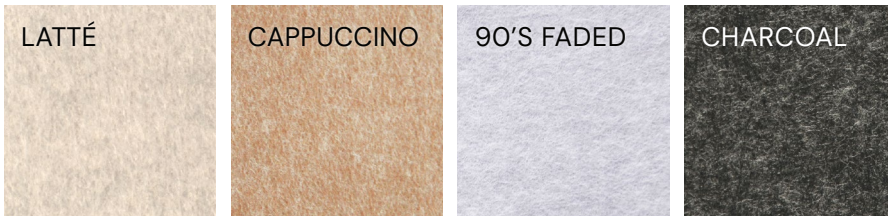


Backing Board



Test Results

Absorption Coefficiency vs. Freq (Hz)

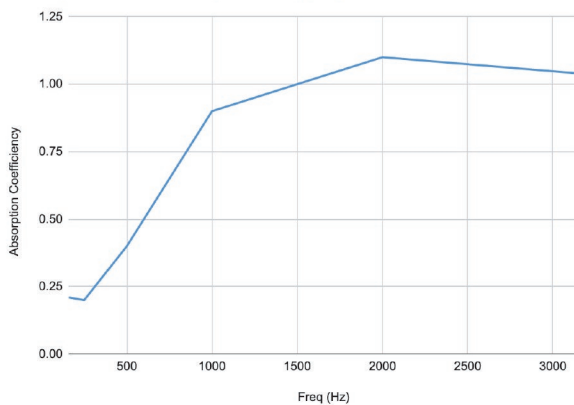

Freq (Hz)	Absorption Coefficiency
160	0.21
250	0.20
500	0.40
800	0.70
1000	0.90
2000	1.10
3150	1.04
NRC	0.65

The Noise Reduction Coefficient (NRC) is calculated as the arithmetic average of the absorption coefficients in the shaded bands only (250, 500, 1250 & 2000 Hz).

ASTM C 423-17: Type A Mounting - Test specimen laid directly against the test surface to simulate a typical wall installation.

Specifications

Product Name	Slat Attack
Lead Times	Fast Ship: 4 weeks Standard: 10 weeks
Content	100% Polyester (PET) with a minimum of 60% recycled content
Thickness	12mm
Width	22.75"
Height	95.5"
Max Depth	21mm
Weight	11 lbs per sq ft
Edge Options	Exposed felt
Sound Performance	ASTM C423-17: NRC = 0.65. Adding a 1–2" air gap behind panel can add 15-20% better NRC performance.
Fire Performance	Class A (ASTM 84)
Variations	Sonus Felt uses an industry standard felting process. Slight and consistent variations in color and "heathering" should be expected when using this sustainable material. Slight imperfections are within normal manufacturing tolerance and not visible in standard installations.
Environmental	Low VOC emissions, formaldehyde and phenol-free. Red List free.
Maintenance	Vacuum to remove any loose dirt or dust then use a soft or plastic bristle brush to loosen. Avoid excess pressure. Compressed air can also be used in difficult or large installations. If stains are present, saturate a lint-free cloth with a mild detergent or soap and water solution.
Warranty	10 years
Unit of Sale	Per section, minimum order quantity: 2