

sonus

Serial Box

Felt Baffle

Just like your favorite breakfast cereal, serialized rectangle baffles have been a mainstay of our (architectural) diet ever since we can remember. And we wouldn't be doing our jobs if we didn't point out that our box baffles look joyfully similar to the popped top of a brand new box. Close your eyes and you can probably smell it now and hear the intro to your favorite Saturday morning cartoon. Back to reality, Serial Box comes in four standard lengths, three standard heights, and has five different mounting options. So whether you're a corn flakes fan or cinnamon squares supporter, we got you covered like milk in a bowl.

Specifying Acoustics never Felt better.

Bringing our legendary innovation, attention to detail, speed, service, and value to PET Felt.

Your Products & Our Purpose

Craft purposeful and beautiful acoustically absorbent products that help designers and builders easily create spaces that enable people to connect and be at their best.



UNMATCHED
PRODUCT
BREADTH

Made in the USA



At the foothills of the
Rocky Mountains

**VACU-
BOND®**

FOR SMOOTHER SURFACES
AND CLEANER CORNERS

2X

FASTER THAN
THE COMPETITION



START TO FINISH
UP-TO-THE-SECOND
ORDER TRANSPARENCY



surface materials

The ultimate in interior finish products.

(440) 248-0000

6655 parkland boulevard
solon, ohio 44139
(440) 519-1950 fax
www.surfacematerials.com

Specifications

Product Name	Serial Box
Lead Times	Fast Ship: 4 weeks Standard: 10 weeks
Content	100% Polyester (PET) with a minimum of 60% recycled content
Thickness	9mm
Length	Standard: 47.5", 59.5", 71.5", 95.5" (Custom lengths available)
Width	2"
Height	Standard: 6", 8.5", & 10.5" (Custom heights available)
Weight	.34 lbs/sq ft (+/- 10%)
Edge Options	Exposed felt
Sound Performance	ASTM C423-17: NRC = 0.90
Fire Performance	Product made from Class A PET felt material tested under ASTM E-84
Variations	Sonus Felt uses an industry standard felting process. Slight and consistent variations in color and "heathering" should be expected when using this sustainable material. Slight imperfections are within normal manufacturing tolerances and not visible in standard installations.
Environmental	Low VOC emissions, formaldehyde and phenol-free. Red List free.
Maintenance	Vacuum to remove any loose dirt or dust. You may use a soft or plastic bristle brush to loosen it. Avoid excess pressure. Compressed air can also be used to dust the material in difficult or large installations. If stains are present, you may saturate a lint-free cloth with a mild detergent or soap and water solution.
Warranty	10 year warranty
Unit of Sale	Per baffle

Connections

Spacing


Baffles may be direct-connect or suspended. Connection points on baffle vary by length of baffle. The following is a guide.

Baffle Length	Distance
18–30"	12"
31–54"	24"
55–95.5"	48"

Suspension

Cable gripper and 1/16" aircraft wire

Attached directly to the deck or ceiling infrastructure, aircraft cables can be arranged in any desired look and feel. The baffles have embedded cable grippers enabling them to be installed in seconds to any deck mounted 1/16" cable.

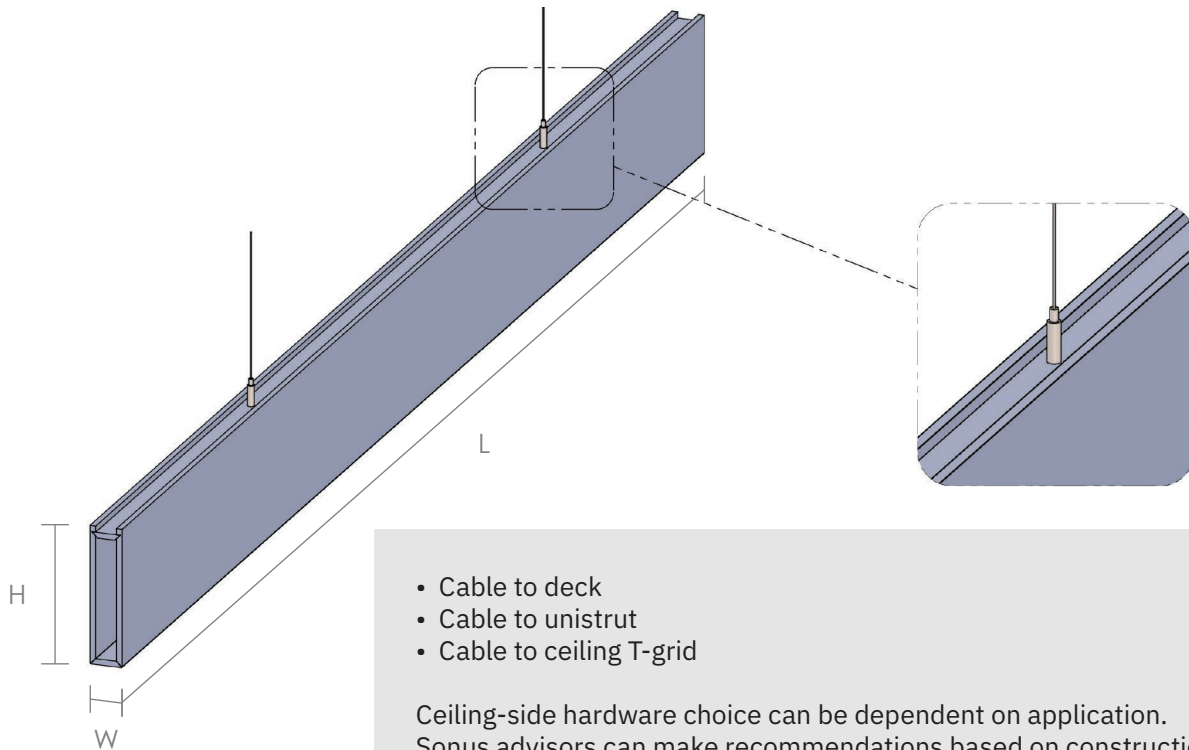

Direct

Stud to unistrut


Bolt directly to unistrut in seconds and enjoy a consistent and balanced installation — saving both time and money.

Colors



Test Results

Absorption Coefficient vs. Freq (Hz)

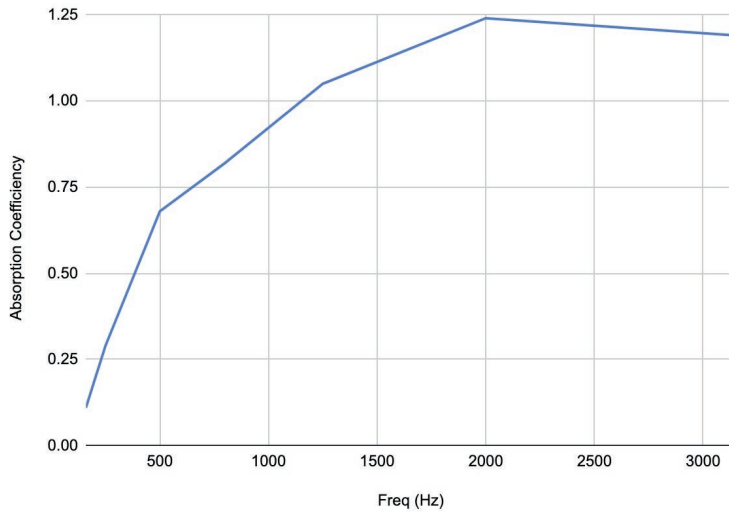

Freq (Hz)	Absorption Coefficient
160	0.11
250	0.29
500	0.68
800	0.82
1250	1.05
2000	1.24
3150	1.19

ASTM C 423-17: Type J Mounting - using 4 baffle units suspended with aircraft wire. 12" oc to simulate a typical baffle installation.